



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> :

H04R 3/00, 25/00, G01S 3/80

A1

(11) International Publication Number:

WO 00/52959

(43) International Publication Date: 8 September 2000 (08.09.00)

(21) International Application Number: PCT/US00/05584

(22) International Filing Date: 3 March 2000 (03.03.00)

(30) Priority Data:

60/123,004	5 March 1999 (05.03.99)	US
09/517,848	2 March 2000 (02.03.00)	US

(71) Applicant: ETYMOTIC RESEARCH, INC. [US/US]; 61 Martin Lane, Elk Grove Village, IL 60007 (US).

(72) Inventors: SOEDE, Willem; Harmen Doumastraat 24, NL-2321 JL Leiden (NL). SCHULEIN, Robert, B.; 215 Brown Avenue, Evanston, IL 60202 (US). MATZEN, Norman, P.; 38 Herbert Lane, Campbell, CA 95008 (US). HORSTEN, Roland; Koetlaan 9, NL-2625 KR Delft (NL).


(74) Agents: WINSLADE, Christopher, C. et al.; McAndrews Held &amp; Malloy, Ltd., 34th Floor, 500 West Madison Street, Chicago, IL 60661 (US).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: DIRECTIONAL MICROPHONE ARRAY SYSTEM

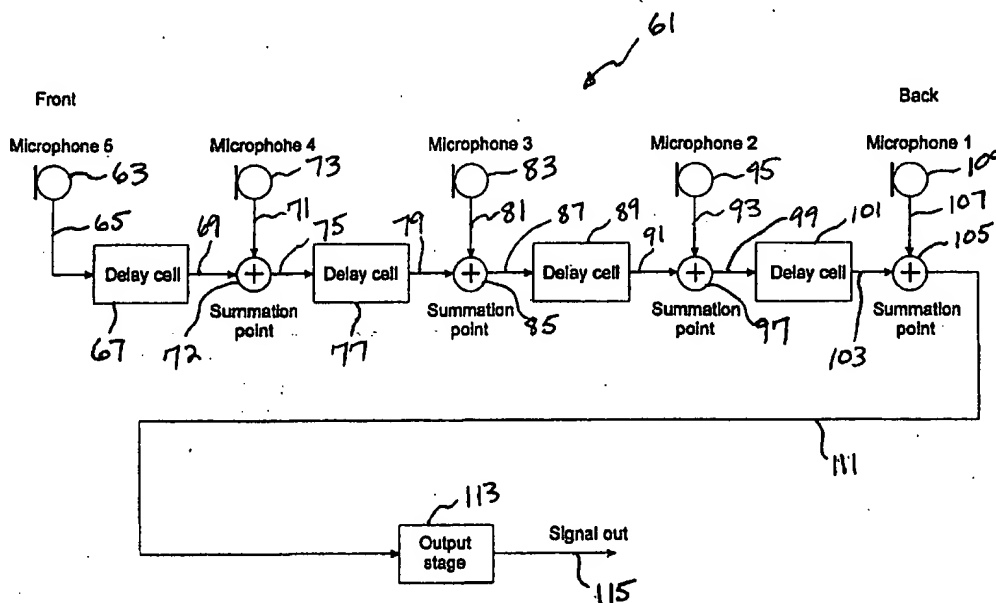

(57) Abstract

A directional microphone array system (31) generally for hearing aid applications is disclosed. The system may employ a broadside or an endfire array (35, 39, 45, 49) of microphones. In either case, the signals generated by the microphone are added using a plurality of summation points (41, 47, 51) that are connected together via a single signal wire or channel. In the case of the endfire array, all but one of the signals is delayed so that the summation of the signals are in phase. The summation of the signals is then used to generate an output signal for a speaker of a hearing aid or the like.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

- 1 -

**TITLE****DIRECTIONAL MICROPHONE ARRAY SYSTEM****CROSS-REFERENCE TO RELATED APPLICATIONS**

This application makes reference to, and claims priority to, United States provisional application Serial No. 60/123,004 filed March 5, 1999.

**INCORPORATION BY REFERENCE**

The above-referenced United States provisional application Serial No. 60/123,004 is hereby incorporated herein by reference in its entirety.

**BACKGROUND OF THE INVENTION**

Individuals with hearing loss typically experience great difficulty understanding speech in noisy environments. This is particularly true for an increasing number of elderly people, who often have difficulty carrying on a normal conversation in social situations, such as parties, meetings, sporting events or the like, involving a high level of background noise. Such hearing loss in noise is generally due to reduced hearing sensitivity of the ear, which results in an attenuation of all sounds and a distortion of sounds. In other words, reduced hearing sensitivity causes a listener to perceive speech to be not only softer, but also garbled.

Hearing aids are known and have been developed to assist individuals with hearing loss. Hearing aids generally amplify sounds, and thus compensate for the attenuation effect of reduced hearing sensitivity. However, it is the distortion effect, i.e., the inability of a listener to discriminate between sounds, that makes speech intelligibility in noise difficult, or even impossible, for most people. A solution to improve speech intelligibility in noise, therefore, must compensate for the distortion effect by attenuating background noise in relation to desired speech signals. In fact, several investigations on speech intelligibility in noise have demonstrated that every 4-5 dB attenuation of background noise may raise speech intelligibility by about 50%.

Directional microphones have been used in hearing aids to attenuate background noise. A suitable measure of the directional effect of such a microphone

- 2 -

is the directivity index. The directivity index indicates in decibels the amount in which a directional microphone attenuates sounds in a diffuse sound field as compared to an omnidirectional microphone. In the frequency range most important for speech discrimination (i.e., about 500 to 5000 Hz), the directivity index for a typical 1<sup>st</sup> order directional microphone is only approximately 5 dB. This level of directivity at such frequencies, while an improvement for individuals with mild to moderate hearing loss is insufficient for situations involving more severe loss.

As a result, the use of several directional microphones was proposed by an inventor in the present application for improving the directivity of a hearing aid and thus speech intelligibility under such conditions of noise and hearing loss. See Soede, Willem, "Improvement of Speech Intelligibility in Noise: Development and Evaluation of a New Directional Hearing Instrument Based on Array Technology" Ph.D. Thesis, Delft University of Technology, Delft, The Netherlands, 1990, which is incorporated herein by reference in its entirety (referenced hereinafter as "the Delft Thesis"). The Delft Thesis proposed that traditional microphone array techniques already of use in other fields, such as astronomy, sonar, radar and seismology, could be used in hearing aid applications to improve directional characteristics.

One such traditional microphone array is shown in FIG. 1a. A microphone array system 2 includes a plurality of microphones 4 aligned along an axis x. Each microphone 4 generates a signal from a desired sound typically impinging along an axis y, as well as from undesired sounds from all directions, and each signal generated is transmitted to a processor 6. Each processed signal is then added to produce an amplified output signal 10. Such a microphone array is generally referred to as a "broadside" array.

Another such traditional microphone array is shown in FIG. 1b. A microphone array system 1 includes a plurality of microphones 3 aligned with equal spacing along an axis z. Sound impinges on each of the microphones 3 along the z-axis as shown by arrow 5. Each signal generated by the respective microphones is then transmitted to a processing block 7. Depending on the location of a particular microphone 3 along the z-axis, the processing block 7 may apply a delay to the received signal.

- 3 -

More specifically, for the first microphone, the signal (labeled  $m_4$ ) is delayed four delay periods 8; for the second (labeled  $m_3$ ), the signal is delayed three delay periods 8; for the third (labeled  $m_2$ ), the signal is delayed two delay periods 8; for the fourth (labeled  $m_1$ ), the signal is delayed one delay period 8; and for the last microphone (labeled  $m_0$ ), the signal is not delayed at all. Applying a delay as such ensures that the signals received along an axis  $z$  are in phase and thus in condition for maximum summation. Once the signals are in phase, each signal is processed using a processor 9, and then all signals are summed to produce an output signal 11.

For sound impinging on the microphone array system 1 at an angle shown by arrow 5, the total delay period ( $\tau_m$ ) for any given processing block 7 in FIG. 1b can be calculated using the following formula:

$$\tau_m = \frac{m\Delta z}{c}, m = 0, 1, 2, 3 \dots$$

where  $m$  represents the microphone 3 number,  $\Delta z$  the distance between the microphones 3, and  $c$  the velocity of sound. Each equal delay period 8 can thus be calculated as  $\tau_m/m$  or  $\Delta z/c$ .

In addition, the number of delay periods 8 for any given number of microphones in an array can be calculated using the following formula:

$$\frac{n(n-1)}{2}$$

where  $n$  is the number of microphones in the array. Thus, for the array in FIG. 1 having five microphones, 10 delay periods 8 are required.

The operation of the microphone array system 1 of FIG. 1b can be demonstrated graphically as shown in FIG. 2. Each microphone 3 generates a signal 13 from impinging sound energy at a particular time along an axis  $t$ . Each generated signal 13, except for the last one corresponding to microphone  $m_0$ , is delayed a period  $\tau$  as discussed above so that the delayed signals 13 are in phase. The signals 13 are then added to produce an output signal 15 (corresponding to signal 1.1 in FIG. 1). Because the same delay period  $\tau$  is applied to all sound received from a direction to the rear of the microphone array, the resulting summed signal received from rear

sounds is out of phase (see signal 17). What results, therefore, is an amplified signal with a preference for all sounds coming from the front of the array. In other words, the array achieves a much higher directivity than is possible with the use of only a single microphone 3. An array of microphones of the type discussed above with respect to FIGS. 1b and 2 above is generally referred to as an "endfire" array.

In the 1930's, Hansen and Woodyard, working with large arrays (approximately 10 times the wavelength) in radar applications, derived a formula mathematically for optimizing the directivity of such endfire arrays. The Delft Thesis mentioned above applied the Hansen and Woodyard principle to acoustics and determined that the time delay  $\tau$  set forth above can be optimized using the following formula:

$$\tau_m = \frac{m\Delta z}{c} (1 + \varepsilon), \text{ with } \varepsilon = \frac{2.94\lambda}{2\pi L} = \frac{2.94c}{2\pi fL}$$

where  $\lambda$  equals the sound wavelength,  $L$  equals the array length, and  $f$  equals the sound frequency. This mathematical Hansen-Woodyard optimization for endfire arrays set forth in the Delft Thesis is plotted in FIG. 3 (as directivity index versus frequency-- see curve 19). The traditional approach (i.e., prior to optimization) is also shown in FIG. 3 as curve 18. The mathematical Hansen-Woodyard optimization is further plotted in FIG. 4 (as delay time versus frequency-- see curve 21). The traditional approach (i.e., prior to optimization) is also shown in FIG. 4 as curve 20.

In implementing a microphone array system to match the mathematical Hansen-Woodyard optimization, however, the Delft Thesis fell short of achieving such optimization (see curves 23 and 25 in FIGS. 3 and 4, respectively). Over a frequency range of approximately 250 to 6000 Hz, the Delft Thesis produced an average directivity index of approximately 8.1 dB. While this was an improvement over the traditional approach (which yielded an articulation index weighted directivity index ("AIDI") of approximately 6.7 dB), the Delft Thesis simply did not match the AIDI of 10.2 dB achieved by the mathematical Hansen-Woodyard optimization.

Thus, it is an object of the present invention to provide a microphone array system that more clearly matches the mathematical Hansen-Woodyard optimization.

- 5 -

It is a further object of the present invention to provide a miniature microphone array system more suitable than traditional arrays for hearing aid applications.

It is yet a further object of the invention to provide a new directivity optimization for short endfire microphone arrays.

### BRIEF SUMMARY OF THE INVENTION

These and other objects of the invention are achieved in a microphone system having a plurality of microphones and a plurality of summation points. The plurality of microphones generate a plurality of electrical signals that are added by the plurality of summation points to generate an output signal. The plurality of summation points are electrically connected together via a single wire or signal channel.

In one embodiment, the microphone system also has a plurality of delay cells for delaying all but one of the electrical signals so that the signals are in phase with the one electrical signal that is not delayed. Each of the delay cells may also have an amplifier for amplifying the delayed signals. The delay cells may delay the electrical signals an equal time period, and in one embodiment may comprise a simple emitter-follower. The delay cells may also include an amplifier, such as, for example, a buffering high impedance fixed gain amplifier.

In another embodiment, the plurality of summation points comprise a plurality of resistors, one for each of the microphones. The resistors may be, for example, of equal value.

The microphone system may also have an output stage that amplifies the plurality of summed electrical signals, and a filter that compensates for the frequency response of the microphones. The system may further have a control system that enables the user to select the directivity of the system. In other words, the user can select the number of microphones to be used by the system, depending on the environment. The control system may be, for example, a zoom selector or a discrete switch. In addition, the control system may enable the user to control the volume of the output signal, depending on the number of microphones selected. The control system may have, for example, a gain control for this purpose.

- 6 -

These and other advantages and novel features of the present invention, as well as details of an illustrated embodiment thereof, will be more fully understood from the following description and drawings.

## **BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING**

FIG. 1a illustrates a traditional prior art broadside microphone array system.

FIG. 1b illustrates a traditional prior art endfire microphone array system.

FIG. 2 is a graphical representation of the functionality of the prior art endfire microphone array system of FIG. 1b.

FIG. 3 is a graphical plot of directivity versus frequency for a traditional prior art endfire array, a prior art implementation of the Hansen-Woodyard optimization for an endfire array, and the mathematical Hansen-Woodyard optimization for large endfire arrays.

FIG. 4 is a graphical plot of delay time versus frequency for a traditional prior art endfire array, a prior art implementation of the Hansen-Woodyard optimization for an endfire array, and the mathematical Hansen-Woodyard optimization for large endfire arrays.

FIG. 5 is a block diagram of an endfire microphone array system according to the present invention.

FIG. 6 is a block diagram of a five microphone endfire array system built in accordance with the present invention.

FIG. 7A shows circuitry for one embodiment of the delay cells of FIG. 6.

FIG. 7B shows circuitry for another embodiment of the delay cells of FIG. 6.

FIG. 8 illustrates detailed circuitry for one embodiment of the five microphone array assembly of FIG. 6 built in accordance with the present invention.

FIG. 9A illustrates a graph of directivity versus frequency for the circuitry of FIG. 8 using the delay cell embodiment of FIG. 7A, as compared to the prior art of FIG. 3.

FIG. 9B illustrates a graph of directivity versus frequency for the circuitry of FIG. 8 using the delay cell embodiment of FIG. 7B, as compared to the prior art.



FIG. 9C illustrates a graph of directivity versus frequency for the circuitry of FIG. 8 using the delay cell embodiment of FIG. 7B and wide range RC values for directivity and output, as compared to the prior art.

FIG. 10A illustrates a graph of delay time versus frequency for the circuitry of FIG. 8 using the delay cell embodiment of FIG. 7A, as compared to the prior art of FIG. 4.

FIG. 10B illustrates a graph of delay time versus frequency for the circuitry of FIG. 8 using the delay cell embodiment of FIG. 7B, as compared to the prior art of FIG. 4.

FIG. 10C illustrates a graph of delay time versus frequency for the circuitry of FIG. 8 using the delay cell embodiment of FIG. 7B and wide range RC values for directivity and output, as compared to the prior art of FIG. 4.

FIG. 11A illustrates a graph of directivity versus frequency for a novel mathematical optimization for short endfire arrays, as compared to the curves of FIG. 9A.

FIG. 11B illustrates a graph of directivity versus frequency for a novel mathematical optimization for short endfire arrays, as compared to the curves of FIG. 9B.

FIG. 12A illustrates a graph of delay time versus frequency for the novel mathematical optimization for short endfire arrays, as compared to the curves of FIG. 10A.

FIG. 12B illustrates a graph of delay time versus frequency for the novel mathematical optimization for short endfire arrays, as compared to the curves of FIG. 10B.

FIG. 13 is a block diagram of a microphone array control system according to the present invention.

FIGS. 14a, 14b, and 14c illustrate three discreet switch embodiments for the control system of FIG. 13.

FIG. 15 illustrates an electronic switch embodiment for the control system of FIG. 13.

FIG. 16a illustrates one embodiment of the microphone array control system of FIG. 13 used in the five microphone endfire array system of FIG. 6.

- 8 -

FIG. 16b is one embodiment of detailed circuitry for the control system embodiment of FIG. 16a.

FIG. 17 is a block diagram of a broadside microphone array system according to the present invention.

5           FIG. 18 illustrates a five microphone broadside array system built in accordance with the present invention.

FIG. 19 illustrates a transmission system according to the present invention for use with microphone arrays of the present invention.

10           FIG. 20 illustrates one embodiment of a portion of the transmission system of FIG. 19 according to the present invention.

### DETAILED DESCRIPTION OF THE INVENTION

15           FIG. 5 is a block diagram of an endfire microphone array system 31 according to the present invention. A plurality of microphones are equally spaced in an array along an axis z. Desired sound energy generally impinges on the microphones in a direction from front to back along the axis z as shown by arrow 33. Each microphone converts the sound energy into an electrical signal which, depending on the location of the microphone in the array, may be transmitted to a processing block for delay and processing. The signals are then added to produce an output.

20           More particularly, sound energy impinges on microphone 35, the first located along the array, which energy is converted into an electrical signal. The electrical signal is then delayed and processed by a processing block 37. The resulting signal, which is now in phase with the incoming signal generated by microphone 39, is added to that incoming signal at summation point 41. The added signal is then delayed and processed by a processing block 43. The resulting signal is now in phase with the incoming signal from microphone 45, and is added with that incoming signal at summation point 47. This process is repeated for all microphones in the array until a last microphone 49. The signal generated by the microphone 49 is simply added at summation point 51 to an output signal of processing block 53 to produce an output 55.

25

30

- 9 -

The endfire microphone array system 31 of FIG. 5 is a substantial improvement over the prior art endfire array shown FIG. 1b. For example, the array system 31 of the present invention requires significantly less components and circuitry than that of the prior art. As mentioned above, for a five-microphone array, the prior art required five different signal wires or channels and ten delay components. In contrast, the array system 31 employing five microphones only requires one signal wire or channel and four delay components. This significant reduction in components makes the array system of the present invention smaller and therefore much more suitable for hearing aid applications in which small, discrete devices are desirable.

In addition, the prior art array required different processing for each microphone, since the delay  $\tau$  used for each microphone was different. In contrast, the array system 31 of the present invention uses equal processors because each delay period is equal. In order to add microphones, therefore, the prior art system had to be completely re-wired. The present invention, on the other hand, enables a simple adding of an additional microphone and processing block onto the front of the array in a daisy chain manner. In other words, the array of the present invention can be expanded or contracted by simply adding or subtracting components.

Additionally, since different delays  $\tau$  were required for each microphone of the prior art, timing optimization was required. In contrast, the present invention eliminates the need for such timing optimization since the components and circuitry are the same for each microphone.

FIG. 6 is a block diagram of a five-microphone array assembly 61 built in accordance with the present invention. Sound energy impinging on microphone 63 is converted to an electrical signal 65, which is transmitted to delay cell 67. The delay cell 67 delays and amplifies the signal 65, and resulting signal 69 is added at a summation point 72 to signal 71 generated by microphone 73. Resulting signal 75 is then transmitted to delay cell 77 where again the signal 75 is delayed and amplified into resulting signal 79, which in turn is added at a summation point 85 to a signal 81 generated by microphone 83. Resulting signal 87 is then delayed and amplified by delay cell 89 into resulting signal 91, which is in turn added at a summation point 97 to signal 93 generated by microphone 95. Finally, resulting signal 99 is delayed and

- 10 -

amplified by delay cell 101 into resulting signal 103, which is added at a summation point 105 to a signal 107 generated by microphone 109. Final resulting signal 111 is then transmitted to an output stage 113 for further processing to create an output signal 115.

5           FIG. 7A shows circuitry for one embodiment of the delay cells of FIG. 6. Resistors 121 and 123, transistor 125, capacitor 127 and resistor 129 form a frequency dependent delay circuit, which performs the delay function discussed above with respect to FIG. 6. Resistor 131 and transistor 133 form a simple emitter-follower to keep a high impedance at the junction of capacitor 127 and resistor 129 of the  
10 frequency dependent delay circuit.

          FIG. 7B shows circuitry for another embodiment of the delay cells of FIG. 6. As can be seen, the delay cell of FIG. 7B is the same as that shown in FIG. 7A, except that additional circuitry was added inside box 122. Specifically, resistors 124 and 126, and capacitor 128 were added as shown. These additional components, along  
15 with capacitor 127 (Cphase) and resistor 129 (Rphase), may have the following values in FIG. 7B:

TABLE I

	Hansen-Woodyard	Wide-Range
Cphase	1nF	1nF
Rphase	68K	82K
R2	27K	2.2K
R3	560K	100K
C4	1.5nF	4.7nF

20           The circuitry of FIG. 7B provides for improved delay (i.e., greater) at low frequencies as compared to the circuitry of FIG. 7A. The values in the first column above result in a delay which approximate the theoretical Hansen-Woodyard optimization, but give a lower output level than that provided by the circuitry of FIG. 7A. These values may be used when the highest directivity at high and low frequencies is desired, and a  
25 lower output is acceptable.

          The values in the second column above may be referred to as "wide-range," and provide optimum delay with a small change in output level as compared to the

- 11 -

circuitry of FIG. 7A. The wide-range values provide a reasonable trade-off between low-frequency directivity and high output level.

As an alternative embodiment to that of FIG. 7B, resistor 124 (R2) may be removed, and resistor 126 (R3) may have the value of 820 K. Such a configuration provides acceptable results and saves circuit space.

FIG. 8 illustrates detailed circuitry 140 for one embodiment of the five-microphone array assembly 61 of FIG. 6 built in accordance with the present invention. As can be seen, FIG. 8 shows microphones 63, 73, 83, 95 and 109, delay cells 67, 77, 89, and 101, summation points 72, 85, 97, and 105, output stage 113 and output signal 115, all of FIG. 6. Output stage 113 is included as part of output cell 112. As mentioned above, each of the delay cells 67, 77, 89 and 101 are identical. The delay cells of FIG. 8, however, are somewhat different than the delay cell embodiments show in FIGS. 7A and 7B.

More specifically, referring to delay cell 77 of FIG. 8. Components 121, 123, 125, 127, and 129 corresponds to the frequency dependent delay circuit discussed above with respect to FIG. 7A. While only the components of FIG. 7A are specifically shown in FIG. 8, the delay cells of FIG. 8 may also incorporate the additional components of FIG. 7B rather than just those of FIG. 7A. The remainder of the delay cell components of FIG. 8, (i.e., five transistors and four resistors), however, form a more complex buffering high impedance fixed gain amplifier, which replaces the simple emitter-follower of FIGS. 7A and 7B. These additional components serve to maintain all direct current levels in the signal path to enable maximum signal swing for each delay cell.

As can be seen from FIG. 8, the final output cell 112 does not include the frequency dependent delay circuit found in the delay cells. Rather the components of the output cell 112 amplify, but do not delay, the input signal to create output signal 115. In addition to containing the output stage, the output cell 112 includes a microphone compensation filter, which compensates for the frequency response of the microphones. FIG. 8 also shows a bias circuit 141 that is connected to each one of the delay cells 67, 77, 89, and 101 as well as to the output cell 112. This circuit sets the bias currents of the delay cells and the output cell at approximate levels.

- 12 -

The following lists exemplary values for the circuitry components illustrated in FIG. 8:

5	R43	2MEG		R13	33K
	C9	330N		R14	33K
	R25	33K		C4	1N
	R26	33K	50	R15	82K
	C10	1N		R9	2K
10	R24	82K		R10	33K
	R20	2K		R12	47K
	R21	33K		R11	100K
	R23	6.8K	55	C6	330N
	R22	100K		R18	33K
	C8	330N		R16	30K
15	R19	33K		C5	330N
	R49	30K		R17	2MEG
	C15	330N	60	R5	33K
	R48	2MEG		R51	150K
	C16	2.2U		C18	1N
20	R31	33K		R4	2K
	R32	33K		R3	33K
	C11	1N	65	R1	47K
	R33	82K		R2	100K
	R27	2K		C7	330N
25	R28	33K		R45	1K
	R30	47K		R46	33K
	R29	100K	70	R44	33K
	C14	330N		T17	BC550B
	R47	33K		T18	BC560B
30	R34	30K		T19	BC560B
	C12	330N		T14	BC560B
	R42	2MEG	75	T15	BC550B
	R39	33K		T16	BC560B
	R40	33K		T24	BC550B
35	C13	1N		T23	BC560B
	R41	82K		T25	BC560B
	R35	2K	80	T20	BC560B
	R36	33K		T21	BC550B
	R38	47K		T22	BC560B
40	R37	100K		T30	BC550B
	C2	330N		T29	BC560B
	R8	33K	85	T31	BC560B
	R7	30K		T26	BC560B
	C1	330N		T27	BC550B
45	R6	2MEG		T28	BC560B
	C3	2.2U		T11	BC550B

- 13 -

T10	BC560B	T3	BC560B
T12	BC560B 10	T2	BC550B
T7	BC560B	T1	BC560B
T8	BC550B	T32	BC560B
T9	BC560B	T33	BC560B
T4	BC550B	T13	BC550B
T5	BC560B 15		
T6	BC560B		

FIG. 9A illustrates a graph of directivity index versus frequency and AIDI values for the circuitry of FIG. 8 using the delay cell embodiment of FIG. 7A, as compared to the prior art of FIG. 3. As is apparent from curve 151, for the frequency range of most significance for speech discrimination (approximately 500-5000 Hz), the circuitry of FIG. 8 nearly identically tracks the Hansen-Woodyard theoretical optimization (curve 19). In stark contrast to the present invention and as mentioned above, the Delft Thesis (curve 23) and traditional approach (curve 18) fall well short of such theoretical optimization. The circuitry of FIG. 8 (incorporating the circuitry of FIG. 7A) yields an average directivity index of approximately 9.8 dB, much closer to the Hansen-Woodyard theoretical optimization value of 10.2 dB than the prior art Delft thesis (8.1 dB) and traditional approach (6.7 dB).

Similarly, FIG. 9B illustrates a graph of directivity versus frequency and AIDI values for the circuitry of FIG. 8, using the delay cell embodiment of FIG. 7B and the delay cell component values in the Hansen-Woodyard column of TABLE I, as compared to the prior art. As is apparent from curve 152, the circuitry of FIG. 8 using the delay cell embodiment of FIG. 7B matches the Hansen-Woodyard theoretical optimization, and at some points is even better than such optimization. This circuitry also provides an AIDI value of 10.2dB, which is identical to the Hansen-Woodyard theoretical optimization AIDI value.

FIG. 9C likewise illustrates a graph of directivity versus frequency and AIDI values for the circuitry of FIG. 8, using the delay cell embodiment of FIG. 7B and the delay cell component values in the wide-range column of TABLE I, as compared to the prior art. As can be seen from curve 154, the wide-range values produce a lower directivity at low frequencies, but then track the Hansen-Woodyard theoretical optimization for higher frequencies in a frequency range of significance for speech discrimination. The wide-range AIDI value is 10.0 dB, which is very close to the

10.2 dB value produced by the Hansen-Woodyard approach. However, as mentioned above, the wide-range values provide a greater output level than that provided by the Hansen-Woodyard values (TABLE I). Thus, the wide-range values may be desirable when higher output levels are desired, and a lower directivity at low frequencies is acceptable.

FIG. 10A illustrates a graph of delay time versus frequency for the circuitry of FIG. 8 using the delay cell embodiment of FIG. 7A, as compared to the prior art of FIG. 4. As can be seen by curve 155, for the frequency range of most significance for speech discrimination, the circuitry of FIG. 8 (incorporating the circuitry of FIG. 7A) nearly identically tracks the Hansen-Woodyard theoretical optimization (curve 21). Again, in stark contrast to the present invention and as mentioned above, the Delft thesis (curve 25) and traditional approach (curve 20) fall well short of such theoretical optimization.

FIG. 10B illustrates a graph of delay time versus frequency for the circuitry of FIG. 8, using the delay cell embodiment of FIG. 7B and the delay cell component values in the Hansen-Woodyard column of TABLE I, as compared to the prior art of FIG. 4. As can be seen from curve 156, the delay times for this circuitry follow the Hansen-Woodyard theoretical optimization, and are even longer at lower frequencies.

Similarly, FIG. 10C illustrates a graph of delay time versus frequency for the circuitry of FIG. 8, using the delay cell embodiment of FIG. 7B and the delay cell component values in the wide-range column of TABLE I, as compared to the prior art. Curve 158 illustrates the shorter delay times at lower frequencies that result from the wide-range component values.

As mentioned above, the Hansen-Woodyard theoretical optimization was developed using large arrays (*i.e.*, where the array length is approximately ten times the wavelength of transmission). Because hearing aid applications involve much smaller arrays (*i.e.*, where the length is less than or equal to the wavelength), a new theoretical optimization was developed to improve over the Hansen-Woodyard theoretical optimization. We have found that the Hansen-Woodyard optimization set forth in the Delft thesis and listed above can be even further improved for short arrays by applying the following frequency dependent correction factor:



$$\tau_{m, new} = \tau_m c(f), \text{ where } c(f) = 1.1 + 0.3 \log(f/1000)$$

This formula is the mean for four, five, or six microphones in an array.

FIG. 11A illustrates a graph of directivity versus frequency similar to FIG. 9A, but including the novel theoretical computed optimization plotted as curve 161. As can be seen, this novel theoretical optimization offers a significant improvement over the Hansen-Woodyard optimization, providing an AIDI of 11.1dB (compared to 10.2 dB for Hansen-Woodyard). Curve 161 was computed for hypercardioid microphones, while curve 19 was computed for dipole microphones. Curve 151 resulted regardless of whether hypercardioids or dipole microphones were used.

Similarly, FIG. 11B illustrates a graph of directivity versus frequency for the novel mathematical optimization for short endfire arrays, as compared to the curves of FIG. 9B.

FIG. 12A illustrates a graph of delay time versus frequency similar to FIG. 10A, but including the new theoretical computed optimization plotted as curve 165. Again, as can be seen, this new theoretical optimization is an improvement over the Hansen-Woodyard optimization. The values above 3000 Hz computed using the new optimization are lower than the Hansen-Woodyard computed optimization values, but are higher for frequencies below 1000 Hz.

Similarly, FIG. 12B illustrates a graph of delay time versus frequency for the novel mathematical optimization for short endfire arrays, as compared to the curves of FIG. 10B.

FIG. 13 is a block diagram of a microphone array control system according to the present invention. The control system 171 enables a user to select the directivity of the microphone array depending on the sound level in a given environment. For example, if a room is particularly noisy, a user may desire to use all  $n$  microphones, or if the room is not noisy at all, the user may decide to use only a single microphone or shut off the array system. The control system 171 may be configured as a discrete switch, enabling the user to select or deselect individual or combinations of microphones. For example, as shown in FIG. 14a, for a five-microphone array, the discrete switch may provide a three-step adjustment where zero, two, or five

microphones can be selected. The discrete switch might instead provide, for example, a four-step adjustment where zero, one, three, or five microphones are selected, as shown in FIG. 14b. Or, as shown in FIG. 14c, a six-step adjustment may be provided where zero, one, two, three, four, or all five of the microphones are selected.

5           The control system 171 may also be a discrete fader implemented by an electronic switch 175 as shown in FIG. 15. The directivity, therefore, could be controlled by a user like the volume of a radio.

FIG. 16a illustrates one embodiment of the microphone array control system of FIG. 13. FIG. 16a incorporates a zoom selector and gain compensation block 173 in the microphone array system of FIG. 6. The block 173 enables the microphones 10       63, 73, 83, and 95 to be selected or deselected via switches 174, 176, 177, and 178, respectively. The block 173 is also used to make the sensitivity adjustments for each configuration of microphone(s) selected.

FIG. 16b illustrates circuitry 172 for one embodiment of the zoom selector and gain compensation block 173 of FIG. 16a. Circuitry 172 may be used in conjunction 15       with the circuitry 140 of FIG. 8. Circuitry 172 connects to circuitry 140 at points 179, 180, and 182 (See FIGS. 8 and 16b), and provides a three-step selection of microphones. More specifically, circuitry 172 selectively shorts out microphones 63, 73, 83 and/or 95 of FIG. 8. Referring to FIG. 8, capacitor 184 is used by circuitry 172 20       to short microphones 63 and 73, so that only microphones 83, 95, and 109 are operating. Capacitor 186 is used by circuitry 172 to short microphones 63, 73, 83, and 95, so that only microphone 109 is operating. In other words, circuitry 172 enables selective operation of one, three, or five microphones. The gain control 182 of circuitry 172 is used to adjust the sensitivity of output signal 115 depending upon 25       whether one, three, or five microphones is/are selected.

FIG. 17 is a block diagram of a broadside microphone array system 181 according to the present invention. The microphone array system 181 includes a plurality of microphones 183 aligned along an axis x. Each microphone 183 30       generates a signal from sound typically impinging along an axis y, and each signal generated is transmitted to a processor 185. Each processed signal is then added to produce an amplified output signal 187. No delay is required because sound reaches each microphone 183 at essentially the same time from the desired y-direction.

The broadside microphone array system 181 of FIG. 17 is a substantial improvement over that of the prior art found in FIG. 1a. For example, the array system 181 of the present invention requires much less circuitry than that of the prior art. As can be seen in FIG. 1a, for a seven-microphone array, the prior art required seven different signal lines. The broadside microphone array of the present invention requires only a single signal line. In addition, the present invention enables the array to be expanded or contracted by the simple addition or subtraction of microphones in a daisy chain manner, without requiring any rewiring. Additionally, equal processors can be used.

In one embodiment, the broadside microphone array system 181 of FIG. 17 may, for example, be implemented using resistors as shown in FIG. 18. FIG. 18 illustrates a five-microphone broadside array 191. Resistors 193 provide the processing and addition functions of the array system. As mentioned above, the resistors may be of equal value. This embodiment requires a minimum of circuitry, which in turn enables smaller hearing assistance devices to be produced.

FIG. 19 illustrates a transmission system 195 according to the present invention for use with microphone arrays of the present invention. An array system 197 is coupled to a transmitter 199 via link 201. In one embodiment, the array and transmitter are housed as separate units. In another embodiment, they are housed in a single unit. The output signal of the array system is transmitted to the transmitter 199, which in turn communicates the signal to a receiver 203 via communication link 205. The receiver 203 is generally located on or in a behind the ear (BTE) or an in the ear (ITE) hearing aid of a user. The receiver may also be located in a pair of earphones or headphones.

Communication link 205 may, for example, be simply a communication cable that links the transmitter and receiver. The communication link 205 may also be wireless, however. For example, the transmitter 199 may include an induction loop, an induction coil, or TMX transmission (of Phonic Ear Corporation), and the receiver 203 may include an induction coil. Alternatively, the transmitter 199 may be a TMX transmitter and the receiver 203 a TMX receiver, or the transmitter 199 and receiver 203 may communicate via radio frequency transmissions (e.g., FM). Transmitter 199

and communication link 205 may also provide acoustical coupling of the array signal with the receiver by use of a transceiver and a tube.

In another embodiment, the transmission system includes a junction box or station 207. In this embodiment, the transmitter 199 may communicate via RF to the station 207 via link 209. The station 207 converts the received signal and communicates via TMX to the receiver 203 via link 211.

FIG. 20 illustrates one embodiment of a portion of the transmission system of FIG. 19 built in accordance with the present invention. The array system 197 and a transmitter 199 of FIG. 19 generally comprise an array unit 215 and a link unit 217, respectively, in FIG. 20. The array unit 215 includes, for example, the microphone array circuitry 140 of FIG. 8 (see reference numbers 218, 219, and 221) as well as the zoom selector circuitry 172 of FIG. 16b.

Link unit 217 includes a zoom-control 223 for manually or automatically selecting the microphones using the circuitry 172, an input stage 225, and an optional programmable signal processing block 227. The circuitry in block 227 is used to adapt the system to different hearing aid manufacturer's designs. Finally, link unit 217 includes a driver stage 229. As mentioned above, the driver stage can transmit signals via any number of methods, including, for example, TMX-transmission, direct wire (e.g., auxiliary, headphones, BTE style induction plate), built-in induction coil, acoustical coupling (transceiver with tube), or RF transmission.

The link unit 217 may removably plug into array unit 215 to form a single unit. Such a configuration enables a user to select the type of output stage desired by simply plugging in the appropriate link unit. Alternatively, the array-unit and link unit can be housed as a single unit.

The array system 197 and transmitter 199 of FIG. 19 may be implemented in a number of devices for use by hearing impaired individuals. For example, they may be mounted as part of the sidepiece or arm of a pair of spectacles, where the transmitter would communicate with a hearing aid. Alternatively, they may be coupled to a BTE hearing aid, where the transmitter would communicate with the hearing aid. Such configurations would also enable binaural use, i.e., two transmission systems could be used, one on each side of the spectacles/BTE for each ear. Alternatively, a broadside array could be used and the array system and transmitter could be mounted on the

front of a pair of spectacles. In any case, the user would then simply need to face the direction of the person with whom communication is desired.

In another embodiment, the array system 197 and transmitter 199 could be incorporated into a pen-type device that could be either mounted or rested on a table, for example, or hand-held. The user would simply point the device in the direction of the person with whom communication is desired. Other configurations are also contemplated, such as, for example, mounting of the system on a neckloop or headband. In general, the system may be used in any application that uses or would benefit from a directional microphone.

Many modifications and variations of the present invention are possible in light of the above teachings. Thus, it is to be understood that, within the scope of the appended claims, the invention may be practiced otherwise than as described hereinabove.

What is claimed and desired to be secured by Letters Patent is:

## CLAIMS

1. A microphone system comprising:  
a plurality of microphones aligned in an array for generating a plurality  
of electrical signals from sound energy received;  
5 a plurality of summation points for adding the plurality of electrical  
signals to generate an output signal; and  
a single signal wire electrically connecting the plurality of summation  
points.

2. The microphone system of claim 1 further comprising a plurality of  
10 delay cells for respectively delaying all but one of the plurality of electrical signals.

3. The microphone system of claim 2 wherein the plurality of delay cells  
further comprises an amplifier for amplifying the plurality of electrical signals.

4. The microphone system of claim 2 wherein the all but one of the  
plurality of electrical signals are delayed an equal time period.

15 5. The microphone system of claim 2 wherein each of the plurality of  
delay cells comprises an emitter-follower.

6. The microphone system of claim 5 wherein each of the plurality of  
delay cells further comprises a buffering high impedance fixed gain amplifier.

7. The microphone system of claim 1 further comprising an amplifier for  
20 amplifying the plurality of summed electrical signals.

8. The microphone system of claim 1 further comprising a filter that  
compensates for the frequency response of the microphones.

9. The microphone system of claim 1 further comprising a control system that enables selection by a user of the directivity of the microphone system.

10. The microphone system of claim 9 wherein the control system enables the user to select only a portion of the plurality of microphones for generating at least one electrical signal from sound energy received.

11. The microphone system of claim 10 wherein the control system adjusts the sensitivity of the output signal based on the portion of the plurality of microphones selected.

12. The microphone system of claim 9 wherein the control system comprises a zoom selector.

13. The microphone system of claim 12 wherein the control system further comprises a gain control for adjusting the sensitivity of the output signal.

14. The microphone system of claim 1 wherein the plurality of summation points comprises a plurality of resistors.

15. The microphone system of claim 14 wherein the plurality of resistors are of equal value.

16. The microphone system of claim 1 wherein the system produces an average directivity index of at least approximately 9.8 dB.

17. The microphone system of claim 16 wherein the system produces an average directivity index of approximately 10.0 dB.

18. The microphone system of claim 16 wherein the system produces an average directivity index of approximately 10.2 dB.

19. A microphone system comprising:  
a plurality of microphones aligned in an array for generating a plurality  
of electrical signals from sound energy received;  
a further microphone aligned in the array for generating a further  
5 electrical signal from sound energy received;  
a plurality of delay cells associated with the plurality of microphones  
for delaying the plurality of electrical signals;  
a plurality of summation points for adding the plurality of delayed  
electrical signals and the further electrical signal to generate an output signal; and  
10 a single signal wire electrically connecting the plurality of delay cells  
and the plurality of summation points.

20. The microphone system of claim 19 wherein the plurality of electrical  
signals are delayed an equal time period by the plurality of delay cells.

21. The microphone system of claim 19 wherein each of the plurality of  
15 delay cells comprises an emitter-follower.

22. The microphone system of claim 21 wherein each of the plurality of  
delay cells further comprises a buffering high impedance fixed gain amplifier.

23. The microphone system of claim 19 further comprising an amplifier  
for amplifying the summed plurality of electrical signals and further electrical signal.

24. The microphone system of claim 19 further comprising a filter that  
20 compensates for the frequency response of the microphones.

25. The microphone system of claim 19 further comprising a control  
system that enables selection by a user of the directivity of the microphone system.



26. The microphone system of claim 25 wherein the control systems enables the user to deselect at least a portion of the plurality of microphones for generating at least the further electrical signal from sound energy received.

5 27. The microphone system of claim 26 wherein the control system adjusts the sensitivity of the output signal based on the deselection by the user.

28. The microphone system of claim 25 wherein the control system comprises a zoom selector.

29. The microphone system of claim 28 wherein the control system further comprises a gain control for adjusting the sensitivity of the output signal.

10 30. The microphone system of claim 19 wherein the plurality of delay cells further comprises an amplifier for amplifying the plurality of electrical signals.

31. The microphone system of claim 19 wherein the system produces an average directivity index of at least approximately 9.8 dB.

15 32. The microphone system of claim 31 wherein the system produces an average directivity index of approximately 10.0 dB.

20 33. The microphone system of claim 31 wherein the system produces an average directivity index of approximately 10.2 dB.

34. A method employed by a microphone array system comprising:  
receiving sound energy at a first microphone;  
transducing by the first microphone the sound energy received into a  
first electrical signal;  
25 delaying the first electrical signal;  
receiving sound energy at a second microphone;

transducing by the second microphone the sound energy received into a second electrical signal;

adding the delayed first electrical signal and the second electrical signal to create a first resulting signal;

5                   delaying the first resulting signal;

receiving sound energy at a third microphone;

transducing by the third microphone the sound energy received into a third electrical signal;

10                   adding the delayed first resulting signal and the third electrical signal to create a second resulting signal; and

generating an output signal using the second resulting signal.

35.   The method of claim 34 wherein generating an output using the second resulting signal comprises at least amplifying the second resulting signal.

15                   36.   The method of claim 34 wherein generating an output using the second resulting signal comprises:

delaying the second resulting signal;

receiving sound energy at a fourth microphone;

transducing by the fourth microphone the sound energy received into a fourth electrical signal;

20                   adding the delayed second resulting signal to the fourth electrical signal to create a third resulting signal; and

generating an output signal using the third resulting signal.

37.   The method of claim 36 wherein generating an output signal using the third resulting signal comprises at least amplifying the third resulting signal.

25                   38.   The method of claim 36 wherein generating an output using the third resulting signal comprises:

delaying the third resulting signal;

receiving sound energy at a fifth microphone;

- 25 -

transducing by the fifth microphone the sound energy received into a fifth electrical signal;

adding the delayed third resulting signal to the fifth electrical signal to create a fourth resulting signal; and

5 generating an output signal using the fourth resulting signal.

39. The method of claim 38 wherein generating an output using the fourth resulting signal comprises at least amplifying the fourth resulting signal.

10 40. The method of claim 34 wherein the signals are delayed a time period of approximately  $\tau$ .

41. The method of claim 36 wherein the signals are delayed a time period of approximately  $\tau$ .

15 42. The method of claim 38 wherein the signals are delayed a time period of approximately  $\tau$ .

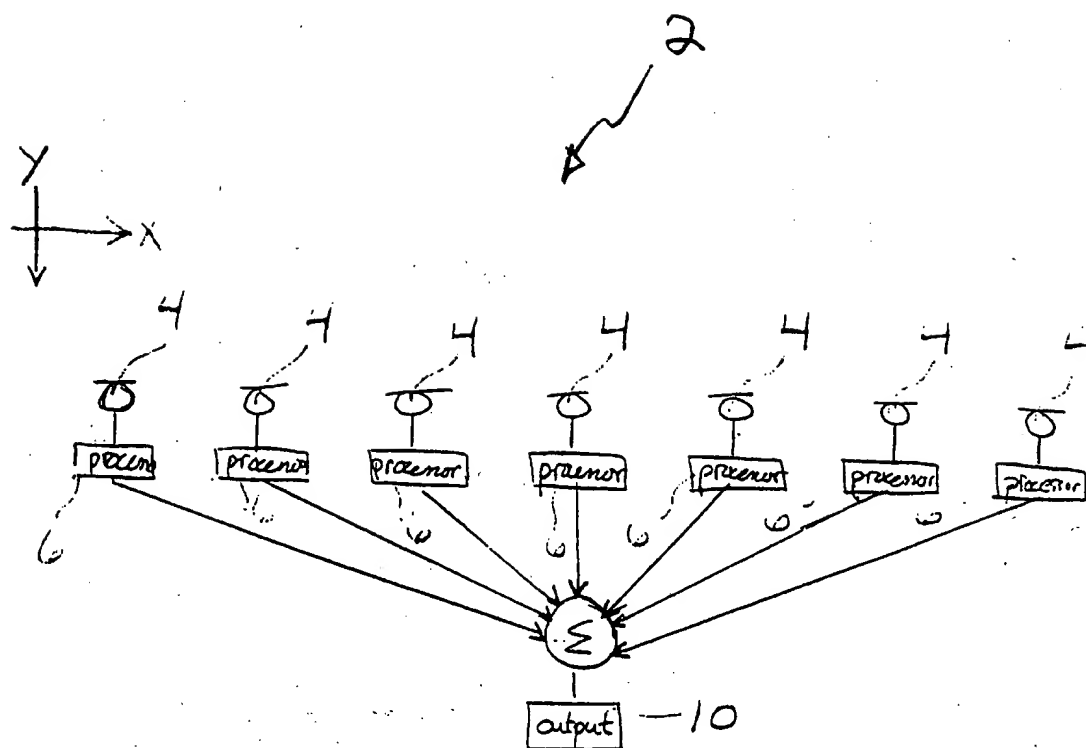


FIG. 1a (PRIOR ART)

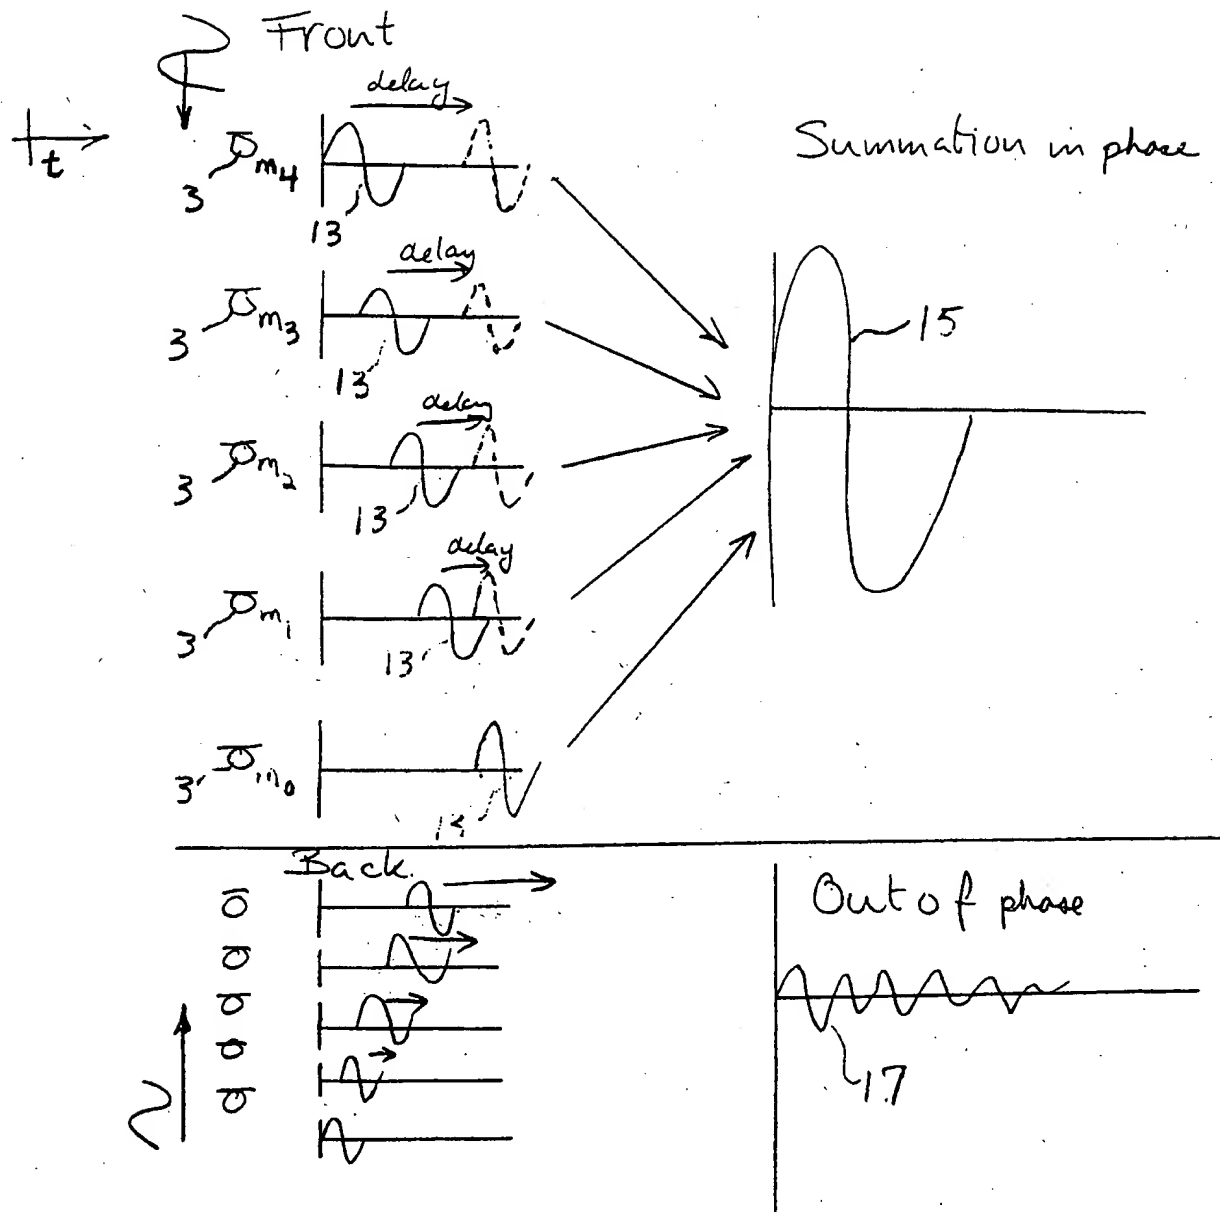


FIG. 2 (PRIOR ART)

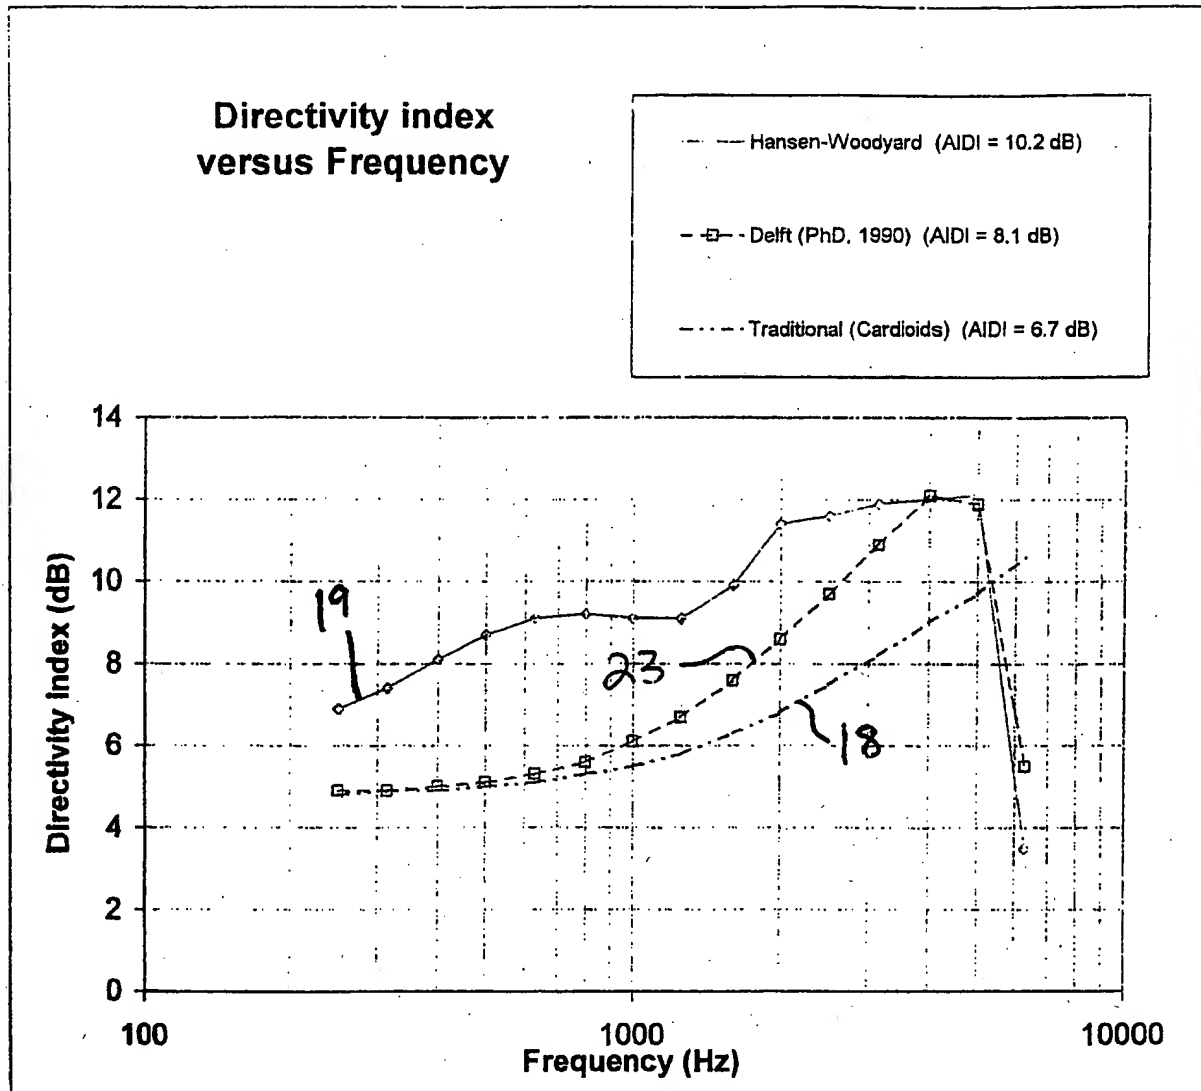


FIG. 3 (PRIOR ART)

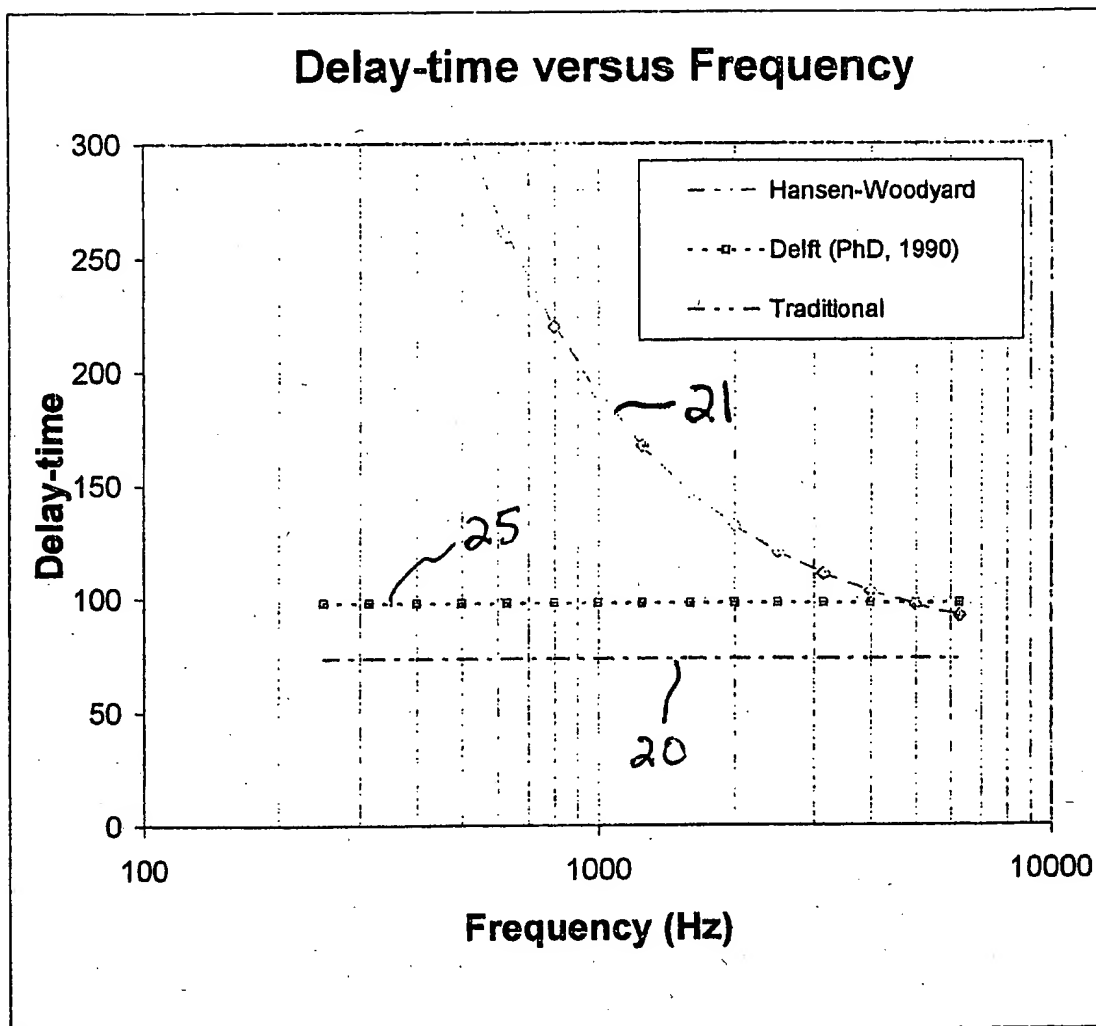


FIG. 4 (PRIOR ART)

31

z

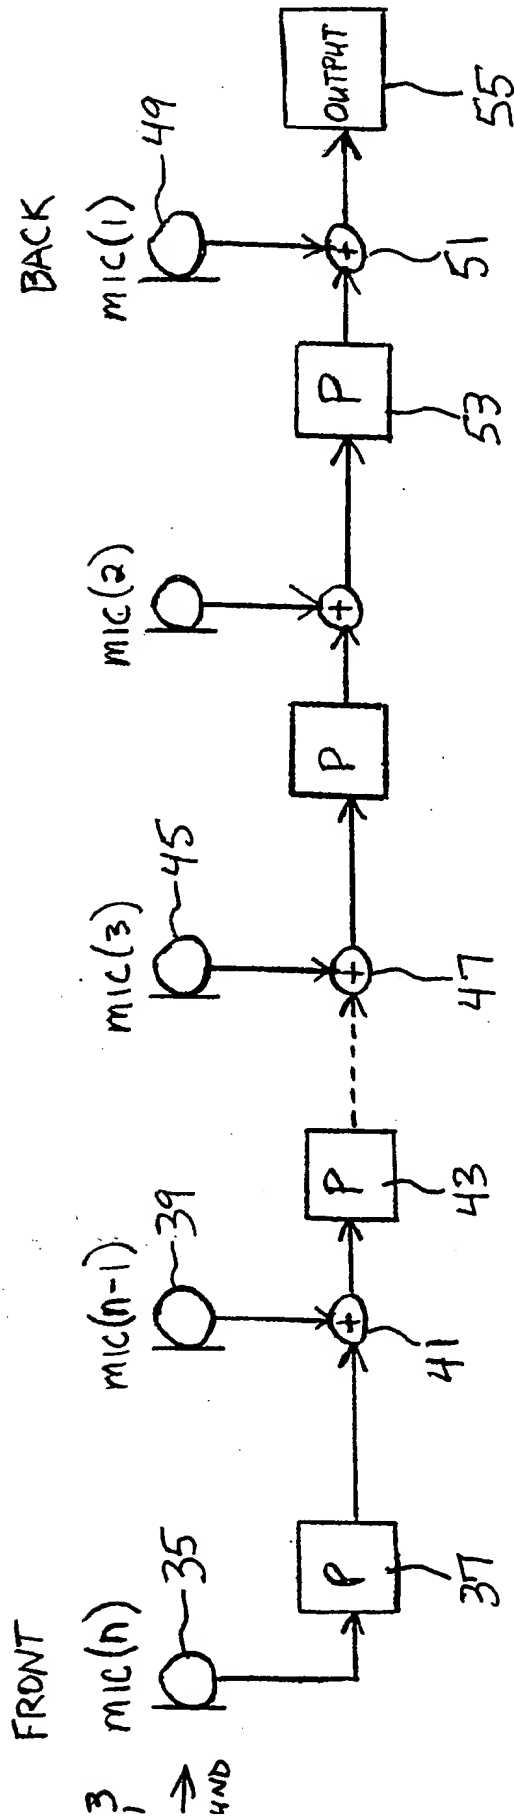
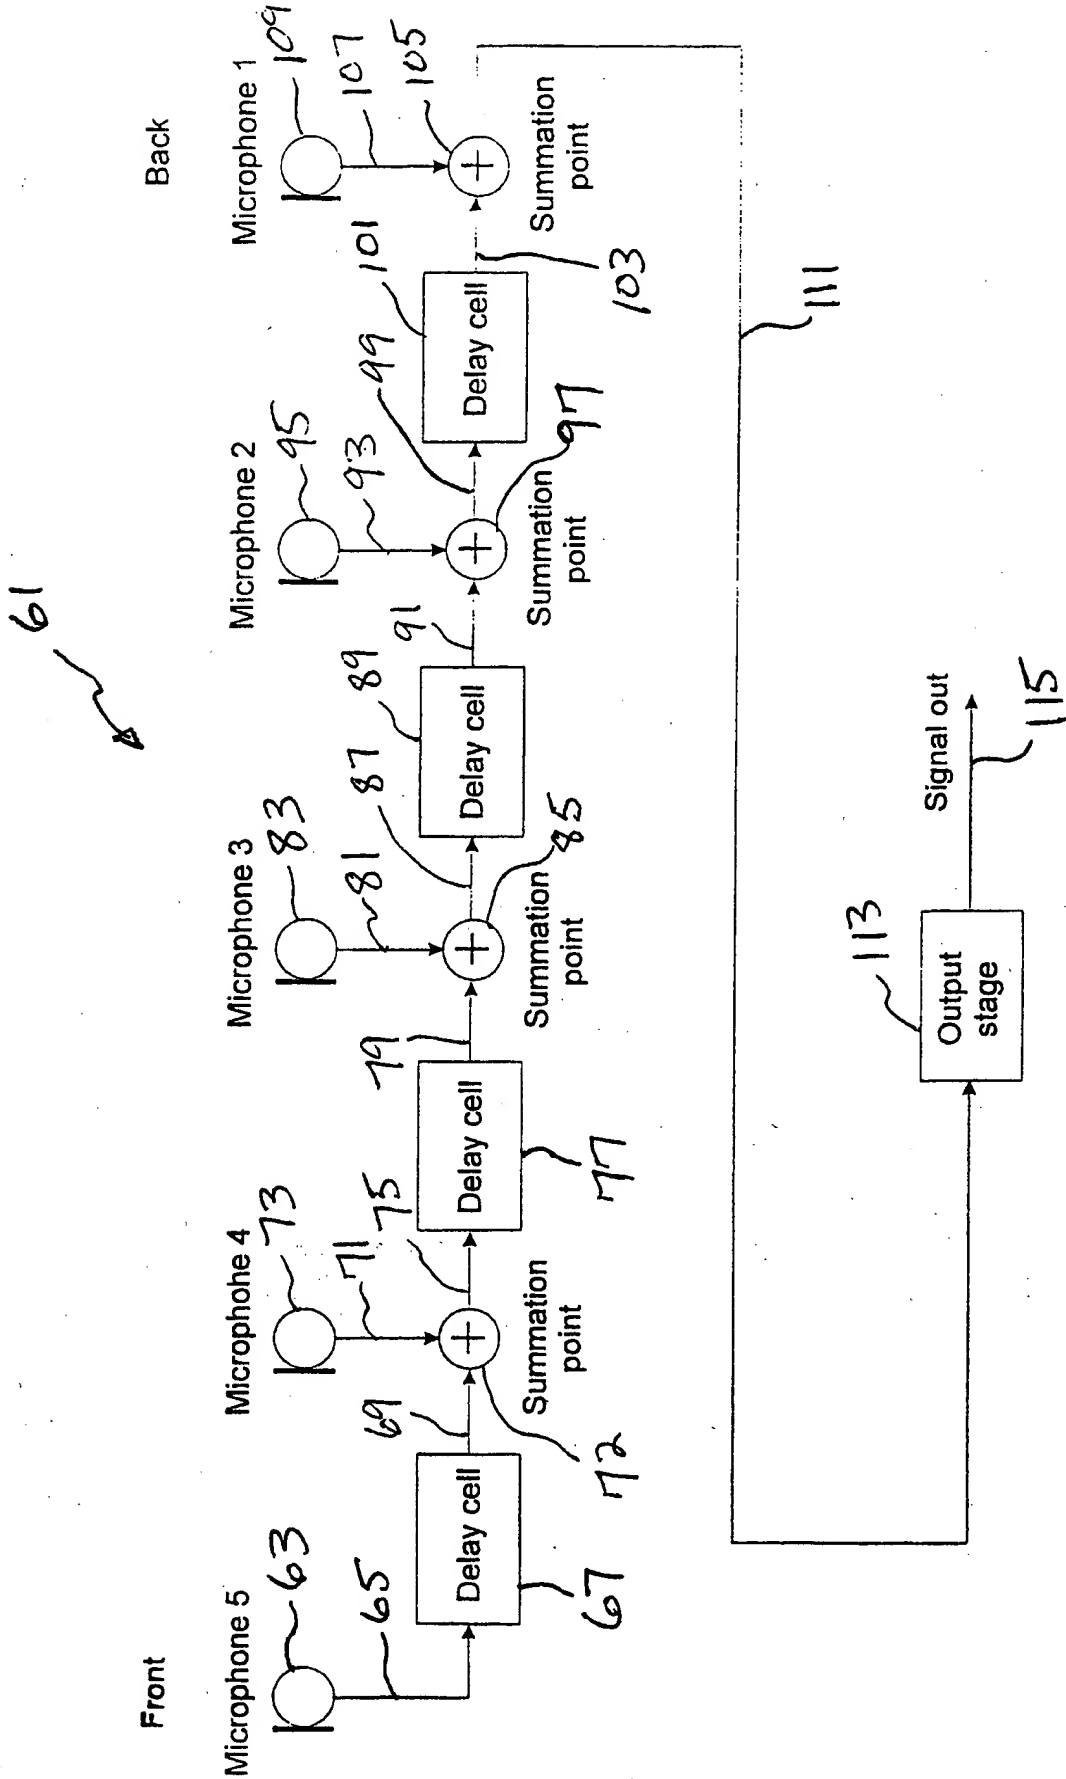


FIG. 5





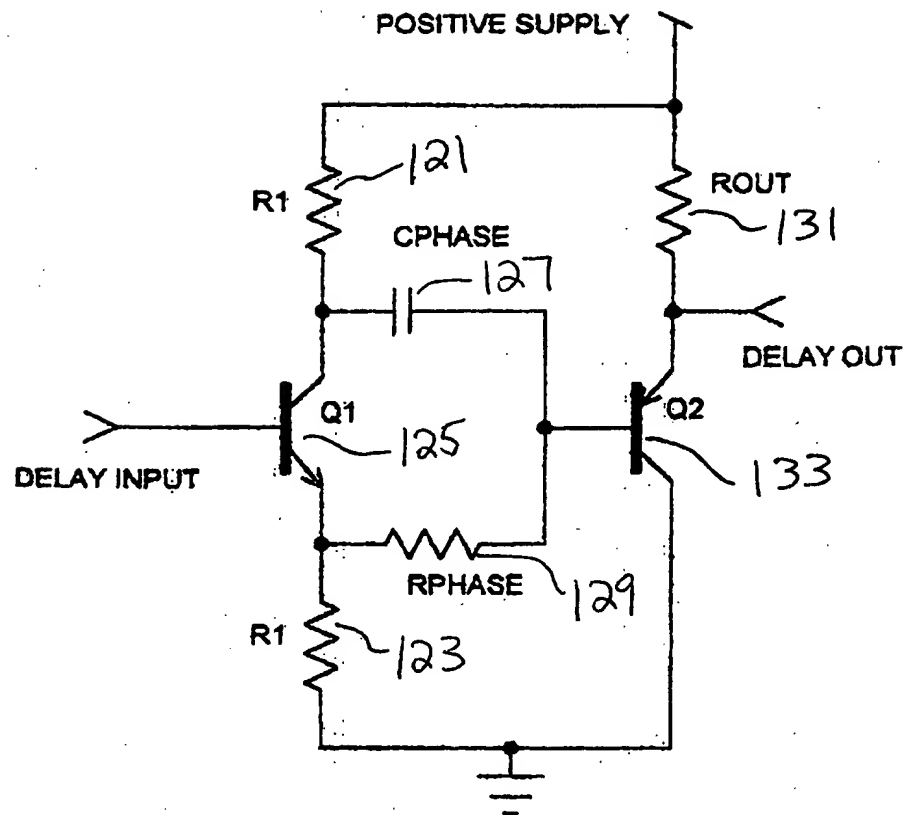


FIG. 7A

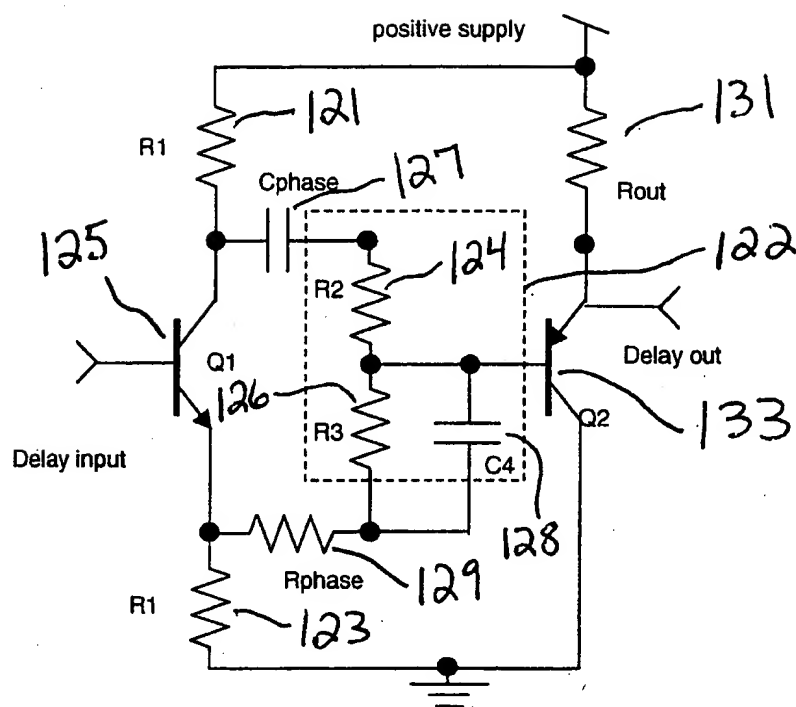
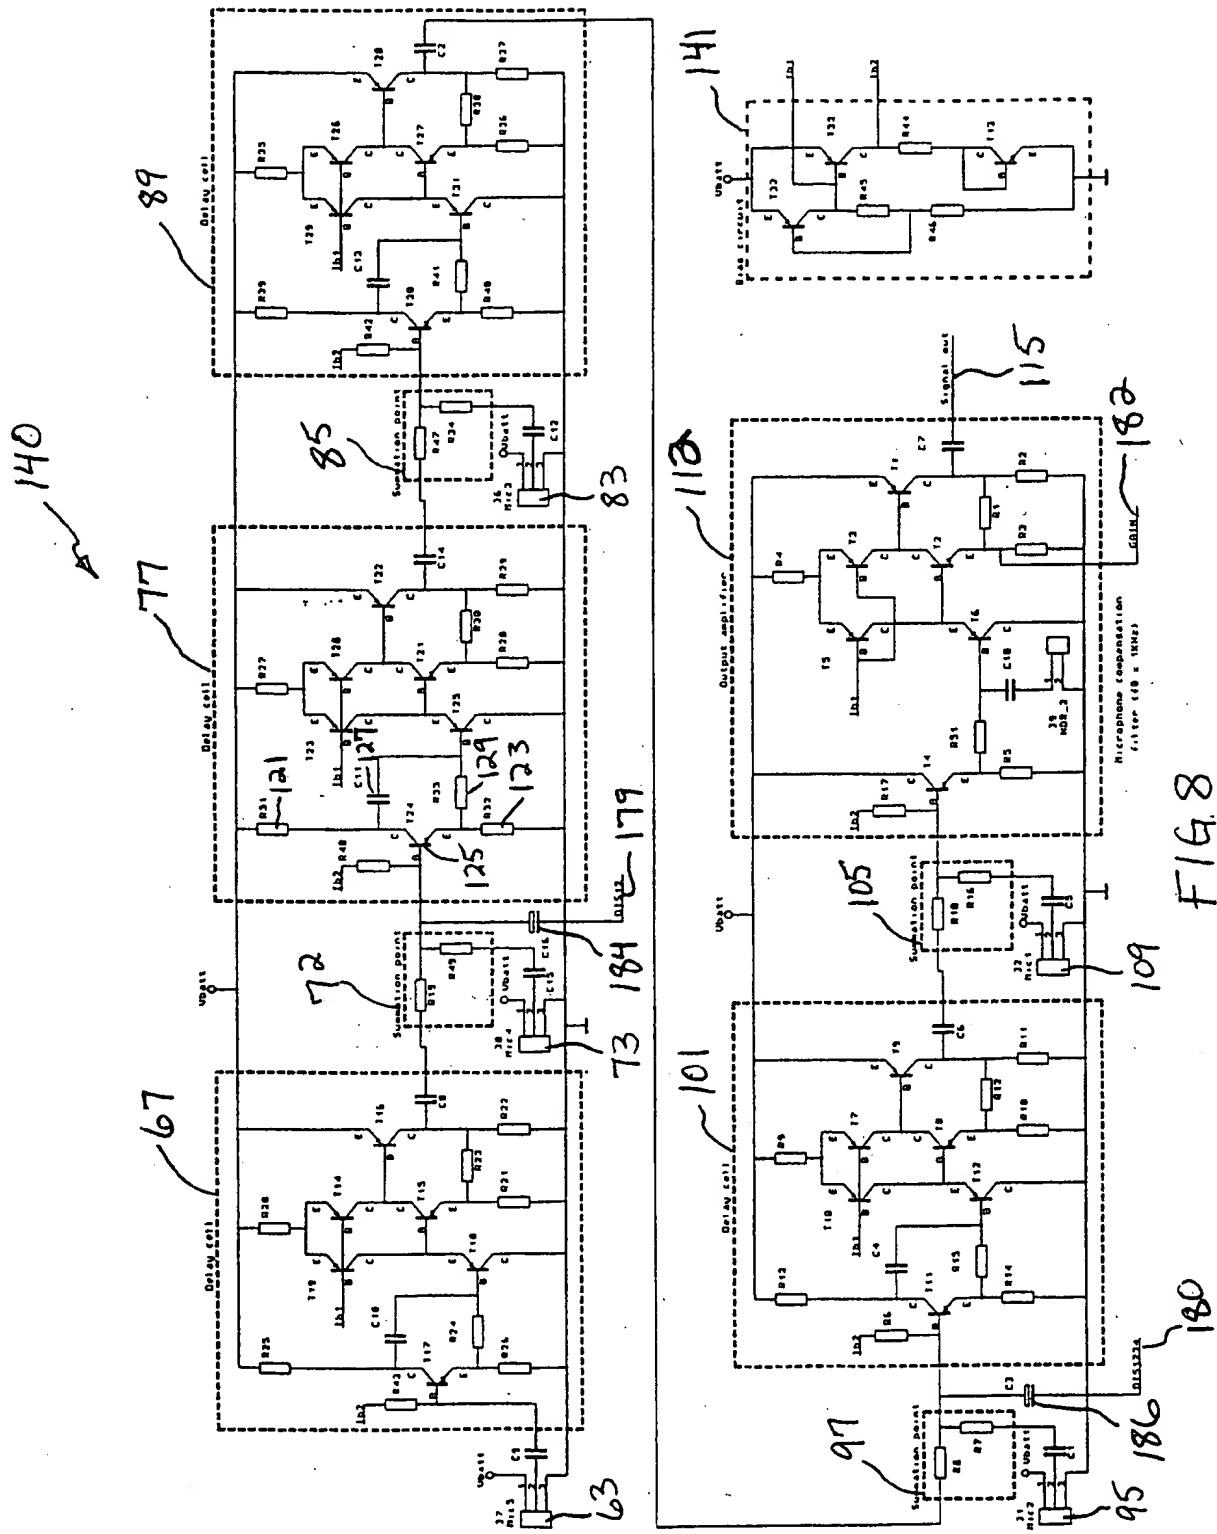


FIG. 7B



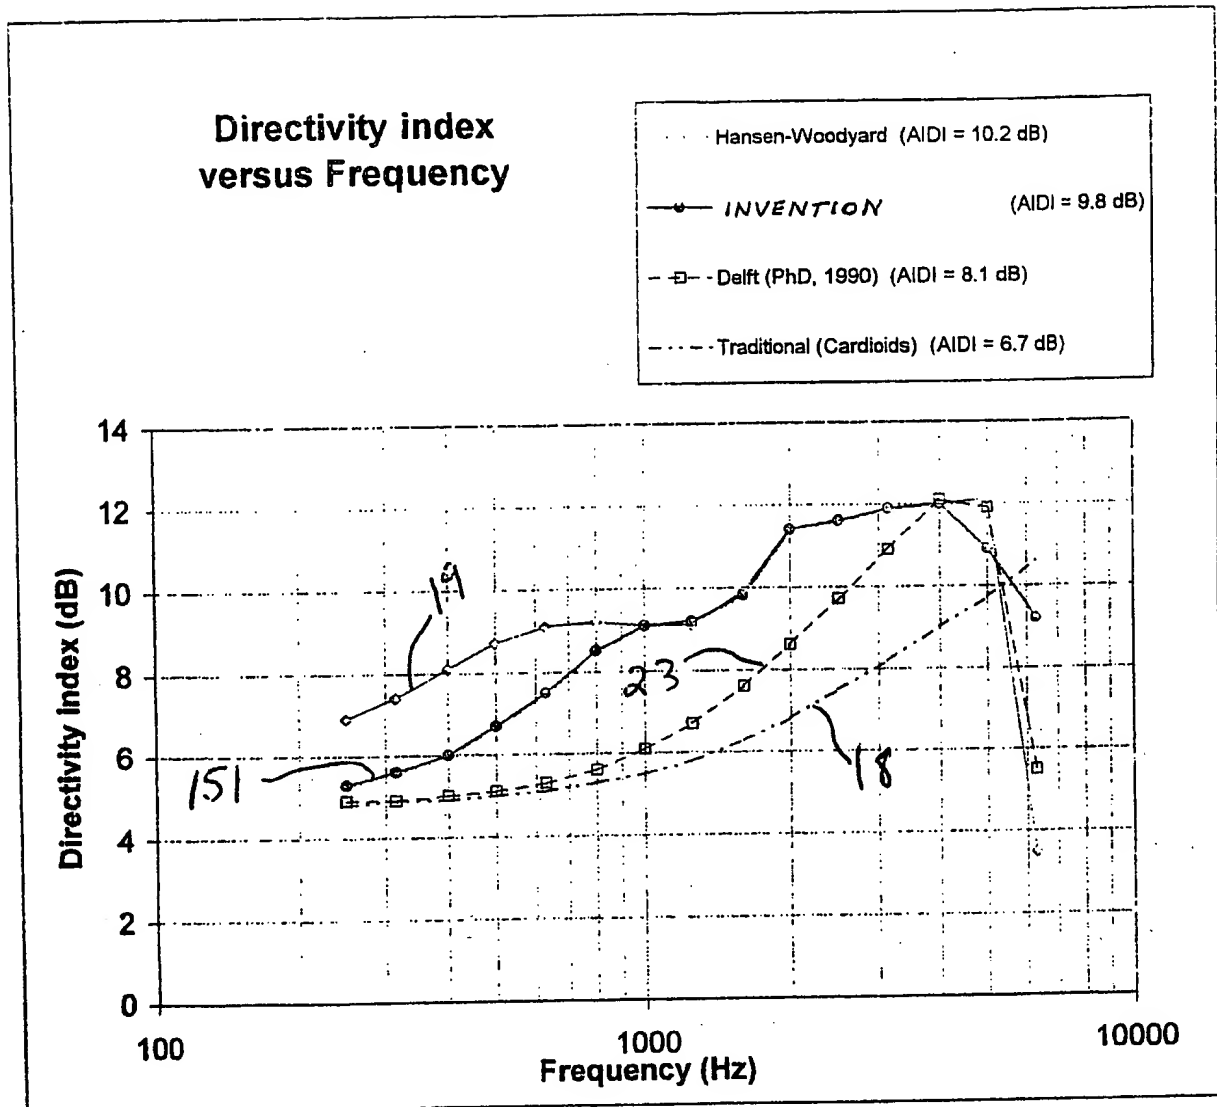


FIG. 9A

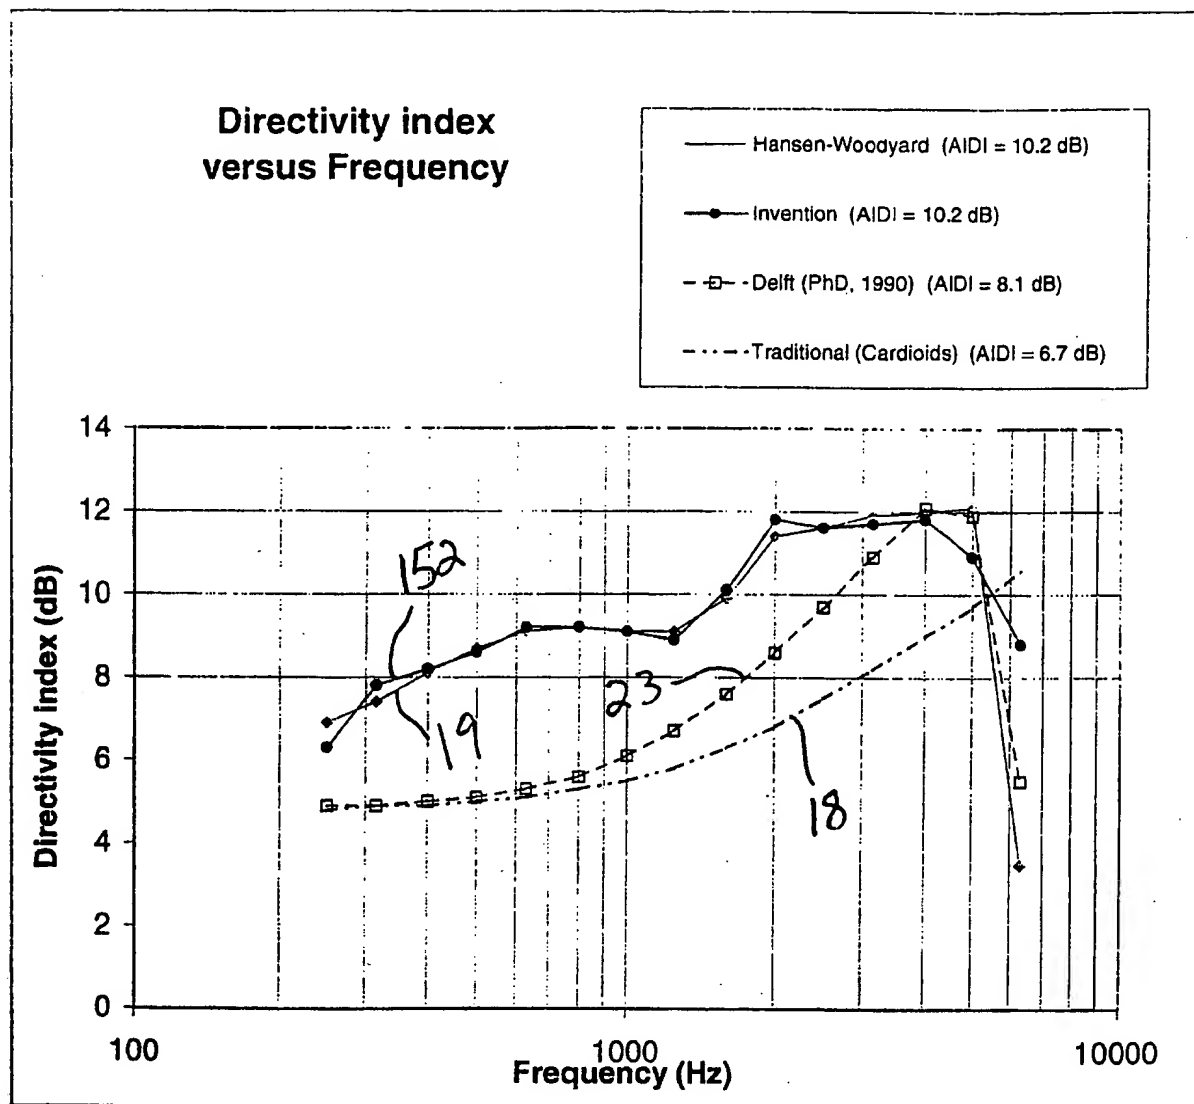


FIG. 9B

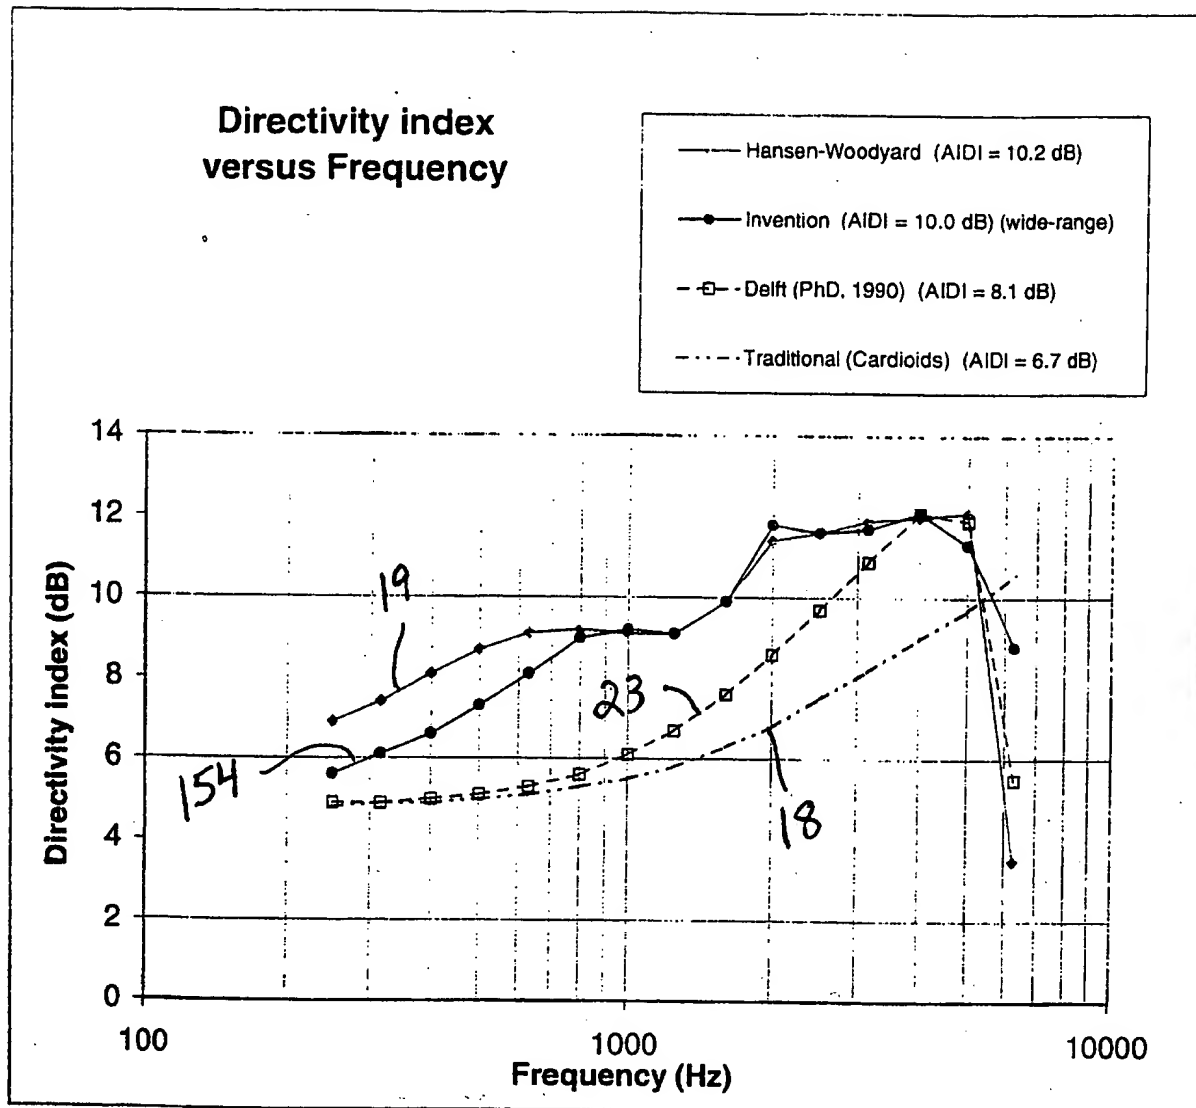


FIG. 9C

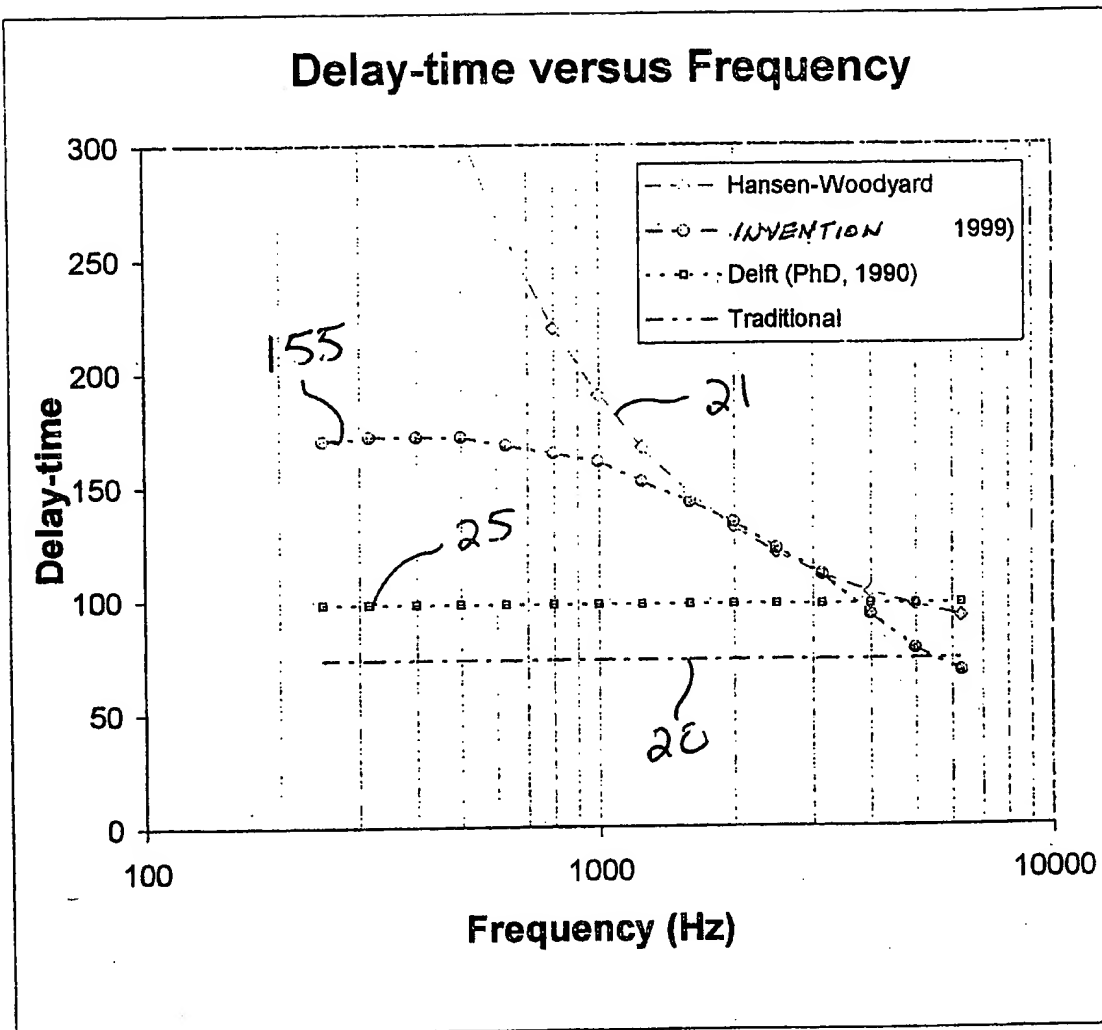


FIG. 10A



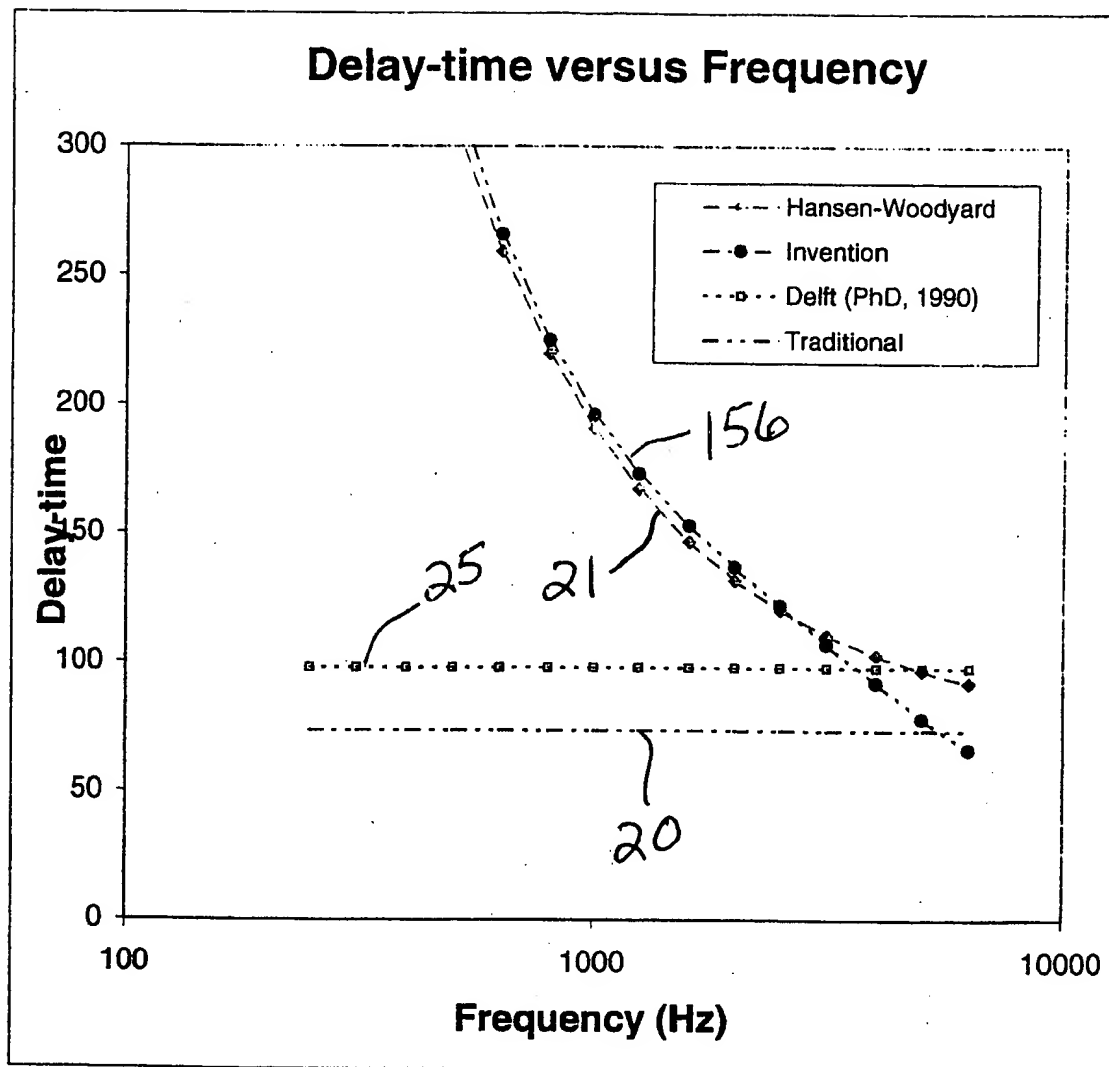


FIG. 10B

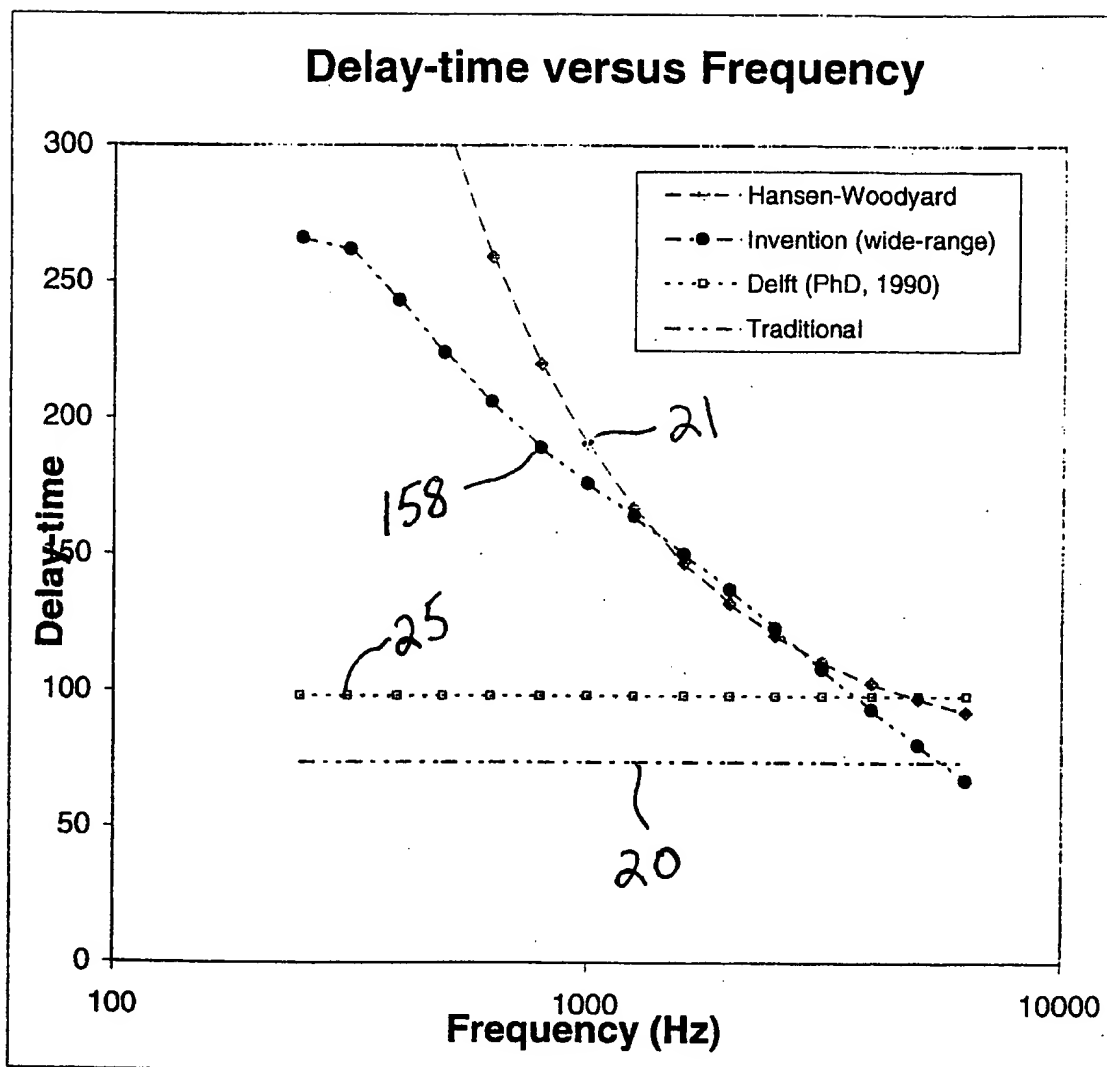


FIG. 10C

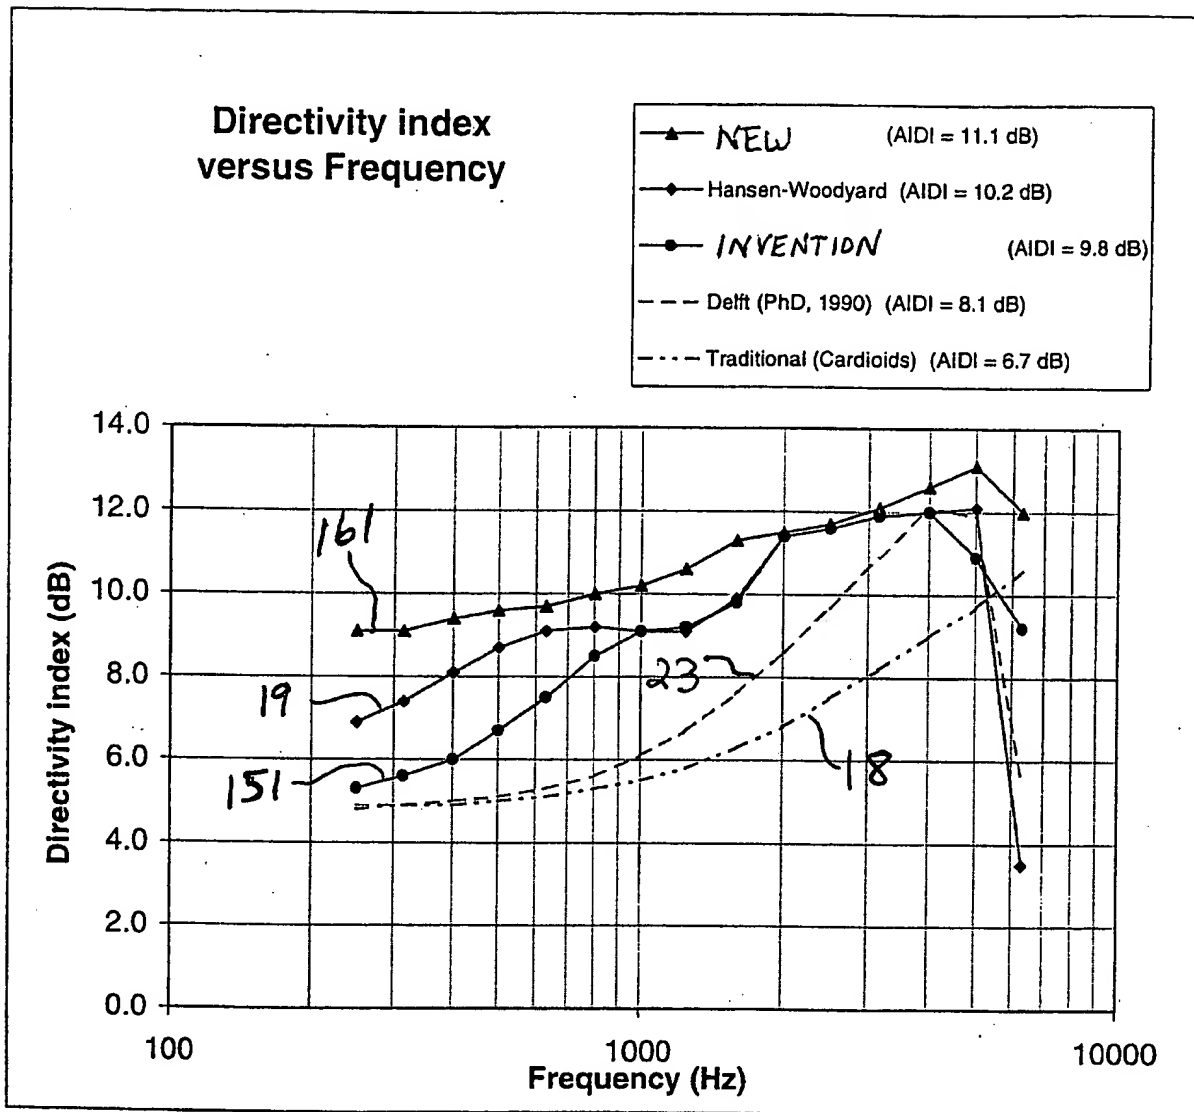


FIG. 11A

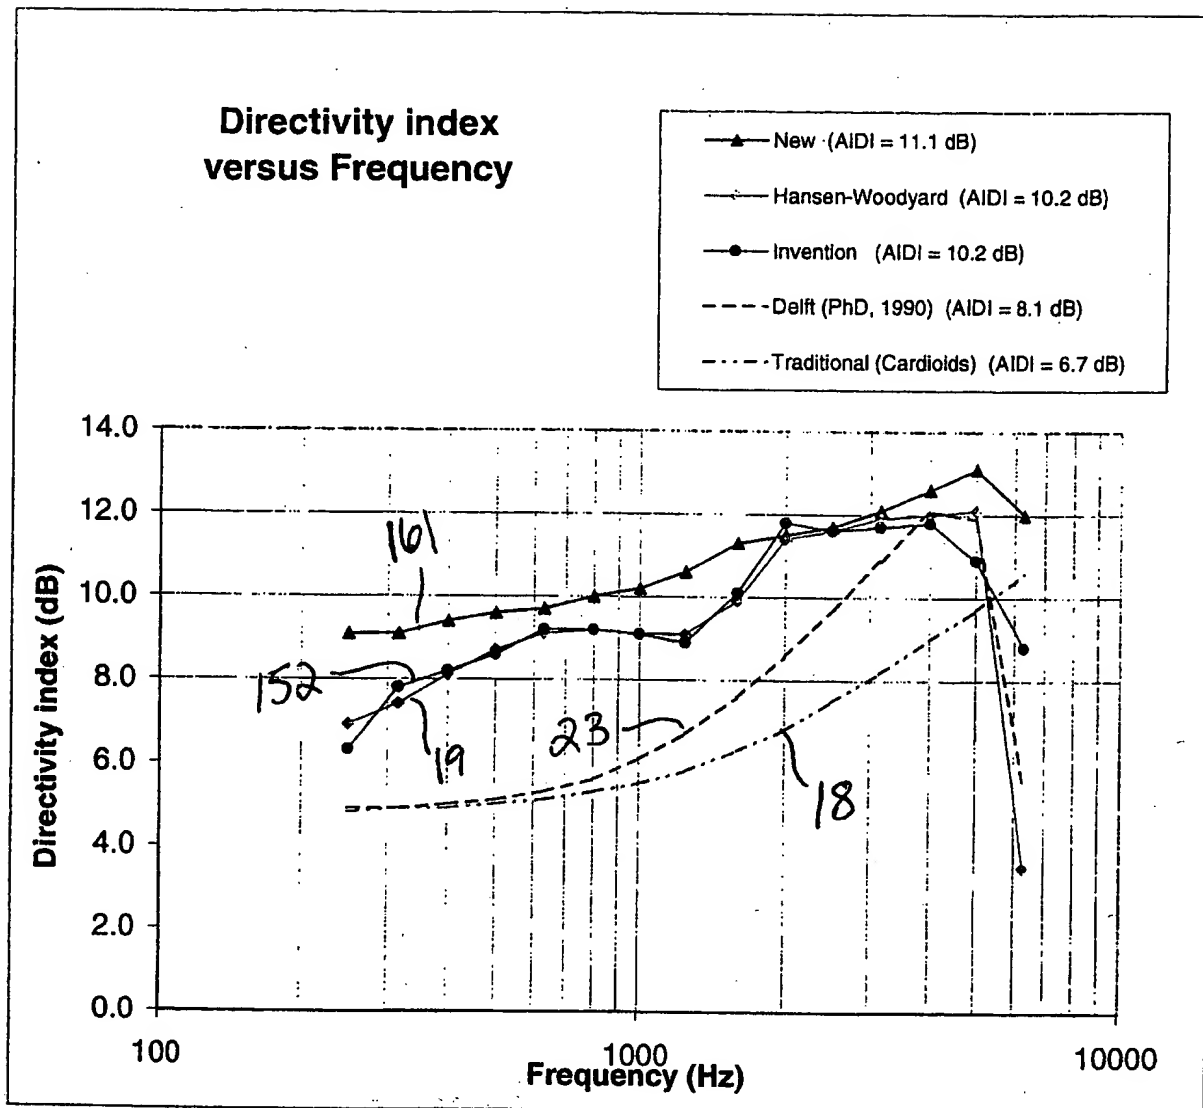


FIG. 11B


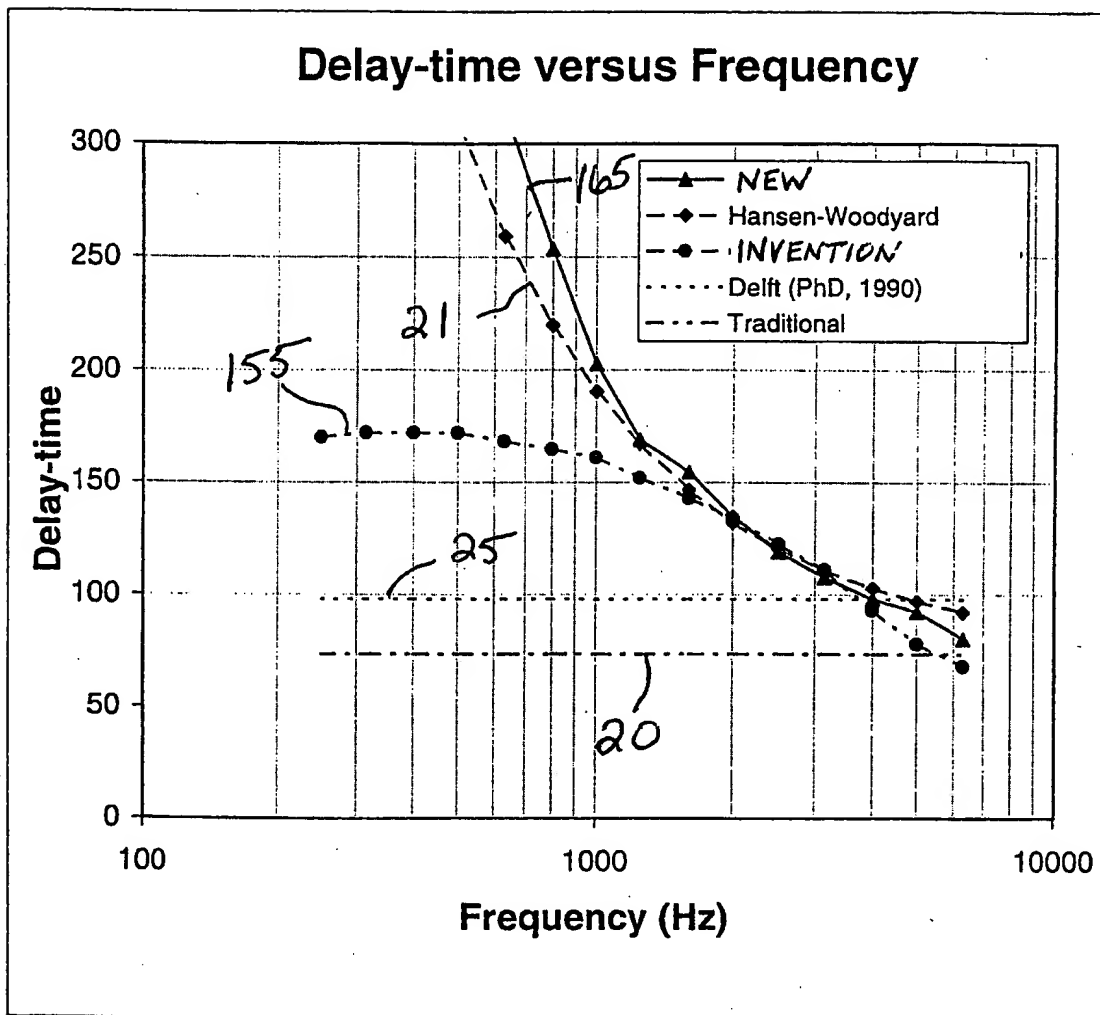


FIG. 12A

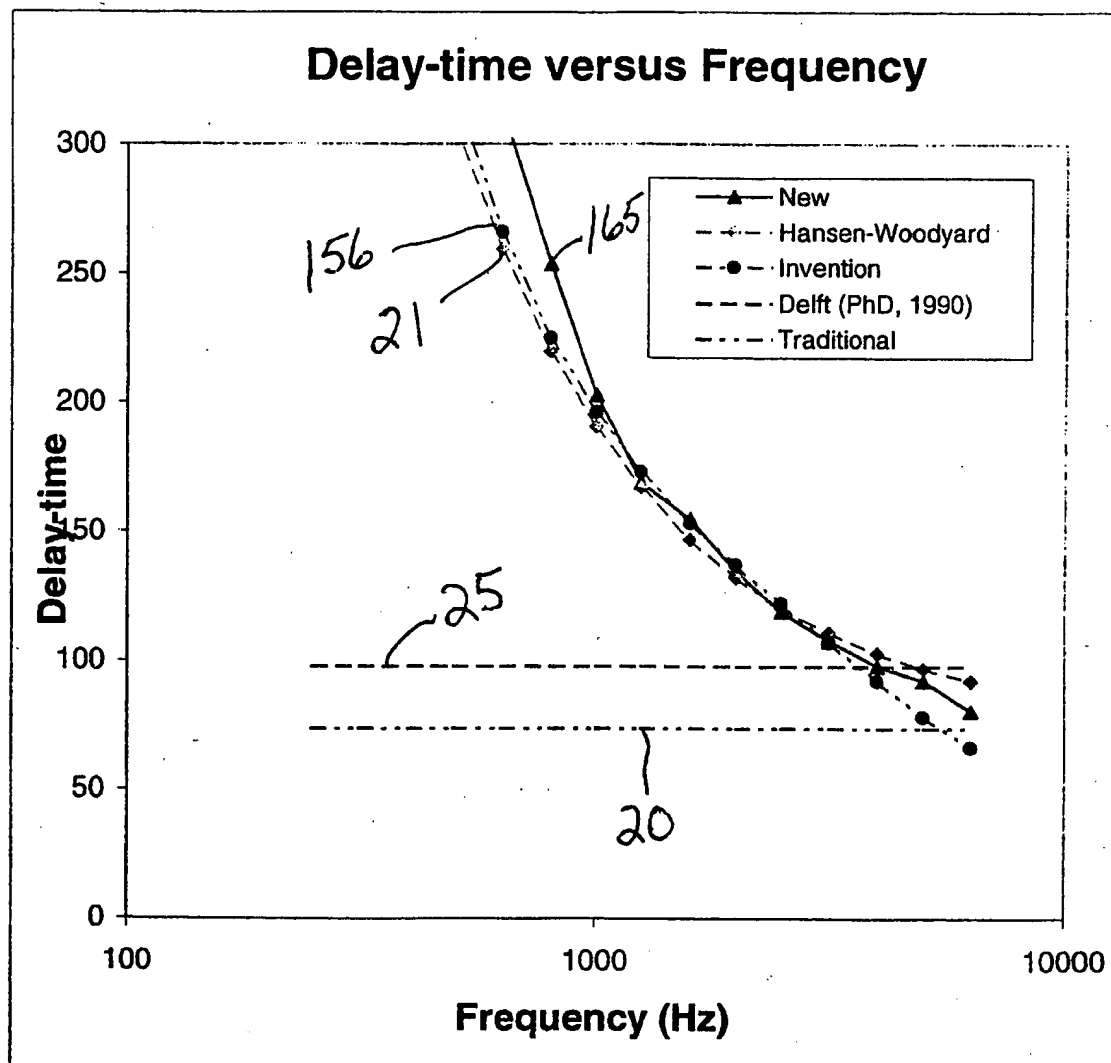

$$c(f) = 1.1 + 0.3 \log(f/1000)$$

FIG. 12B

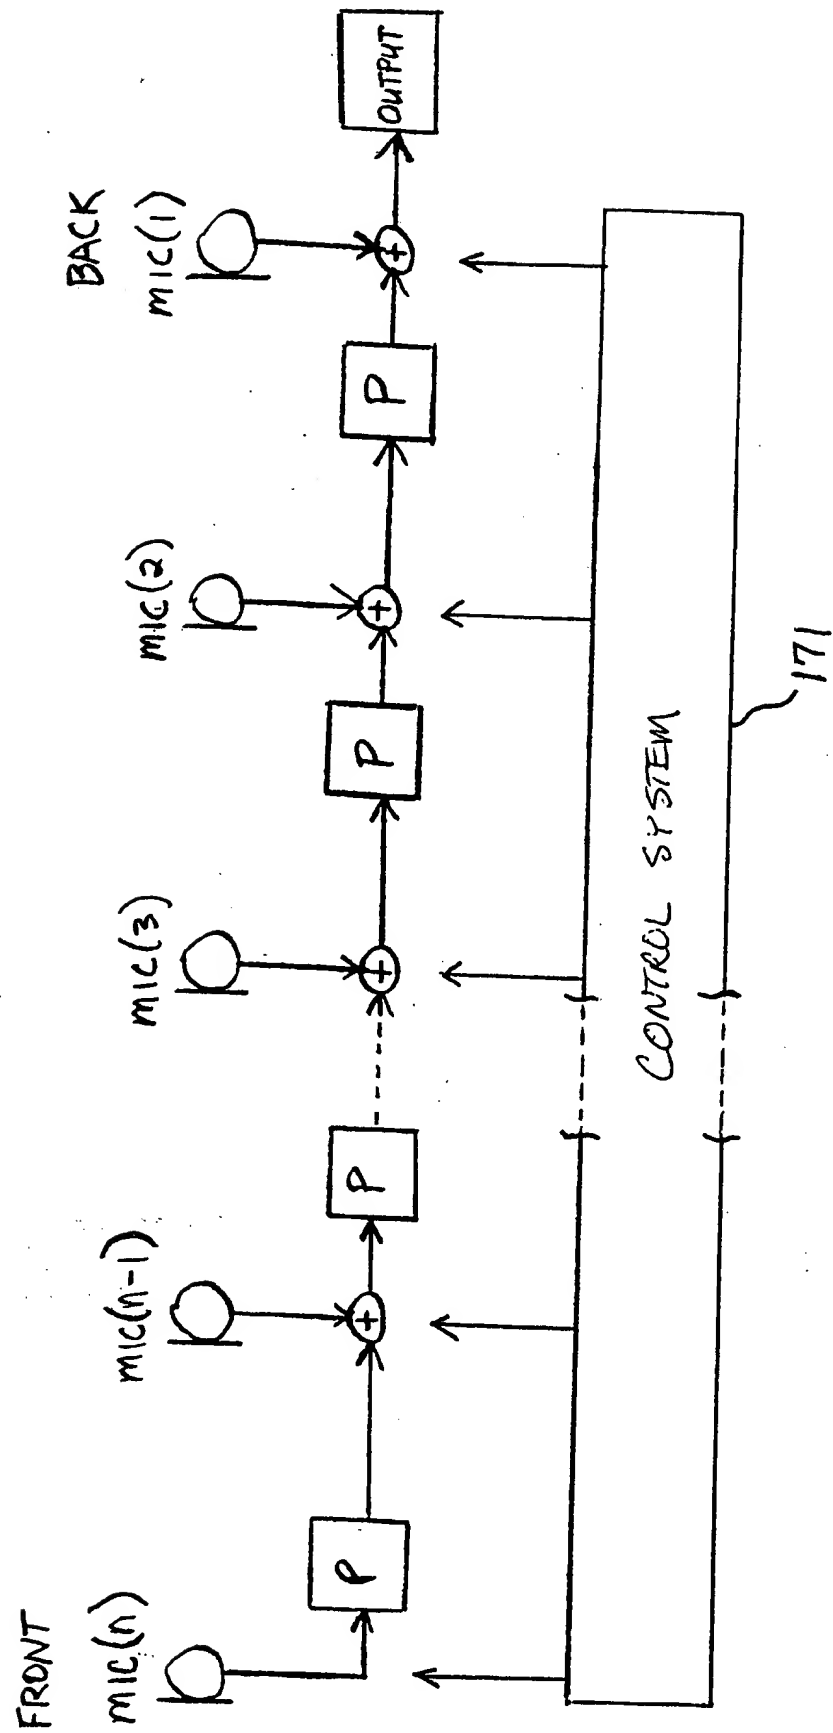


FIG. 13




FIG. 14a




FIG. 14b




FIG. 14c



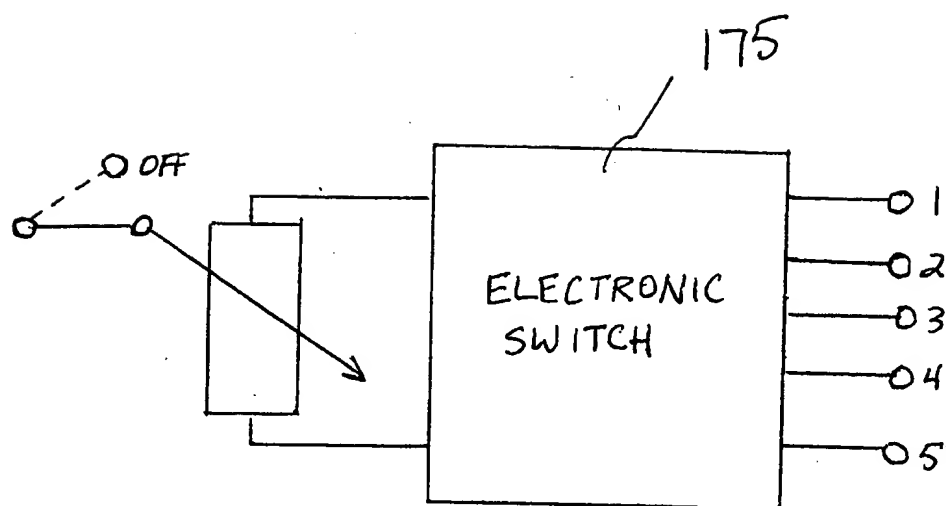


FIG. 15

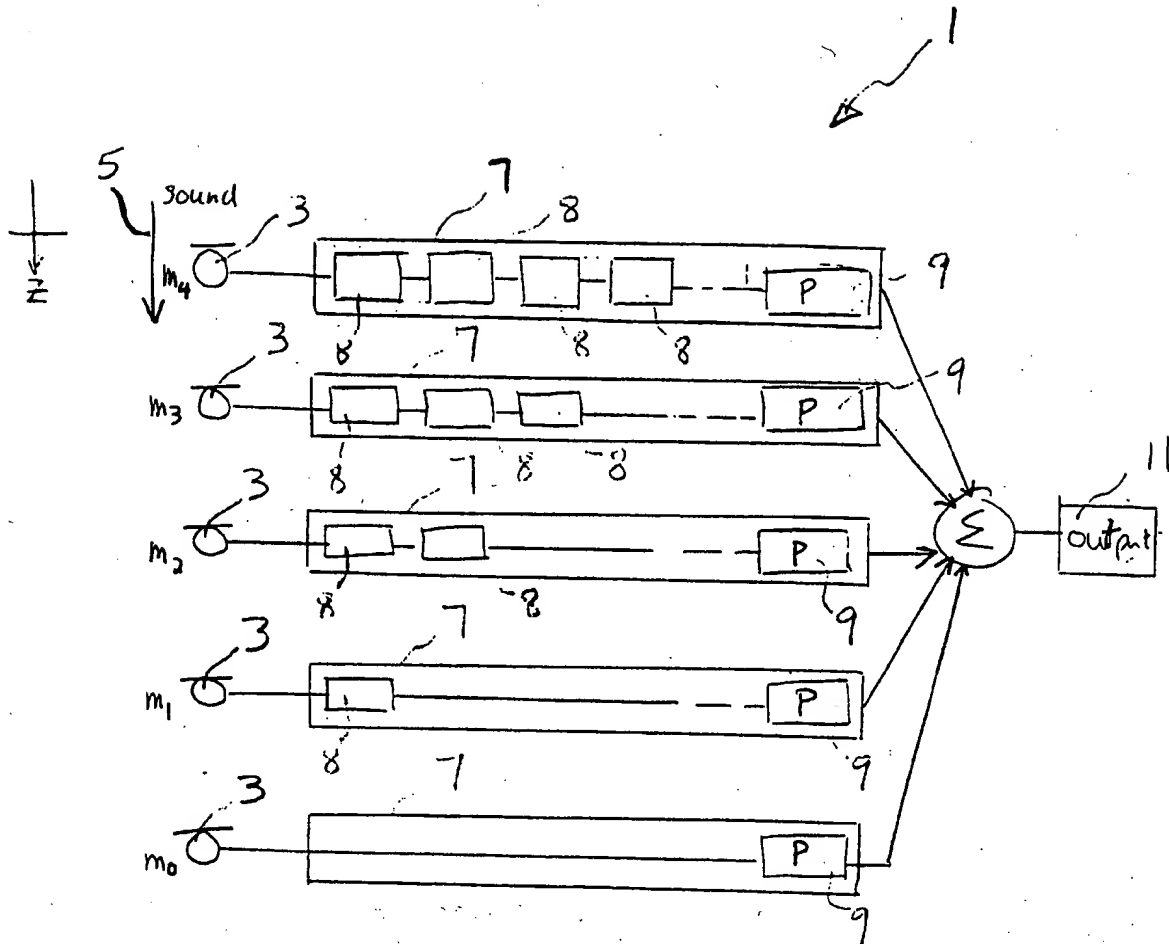


FIG. 16 (PRIOR ART)

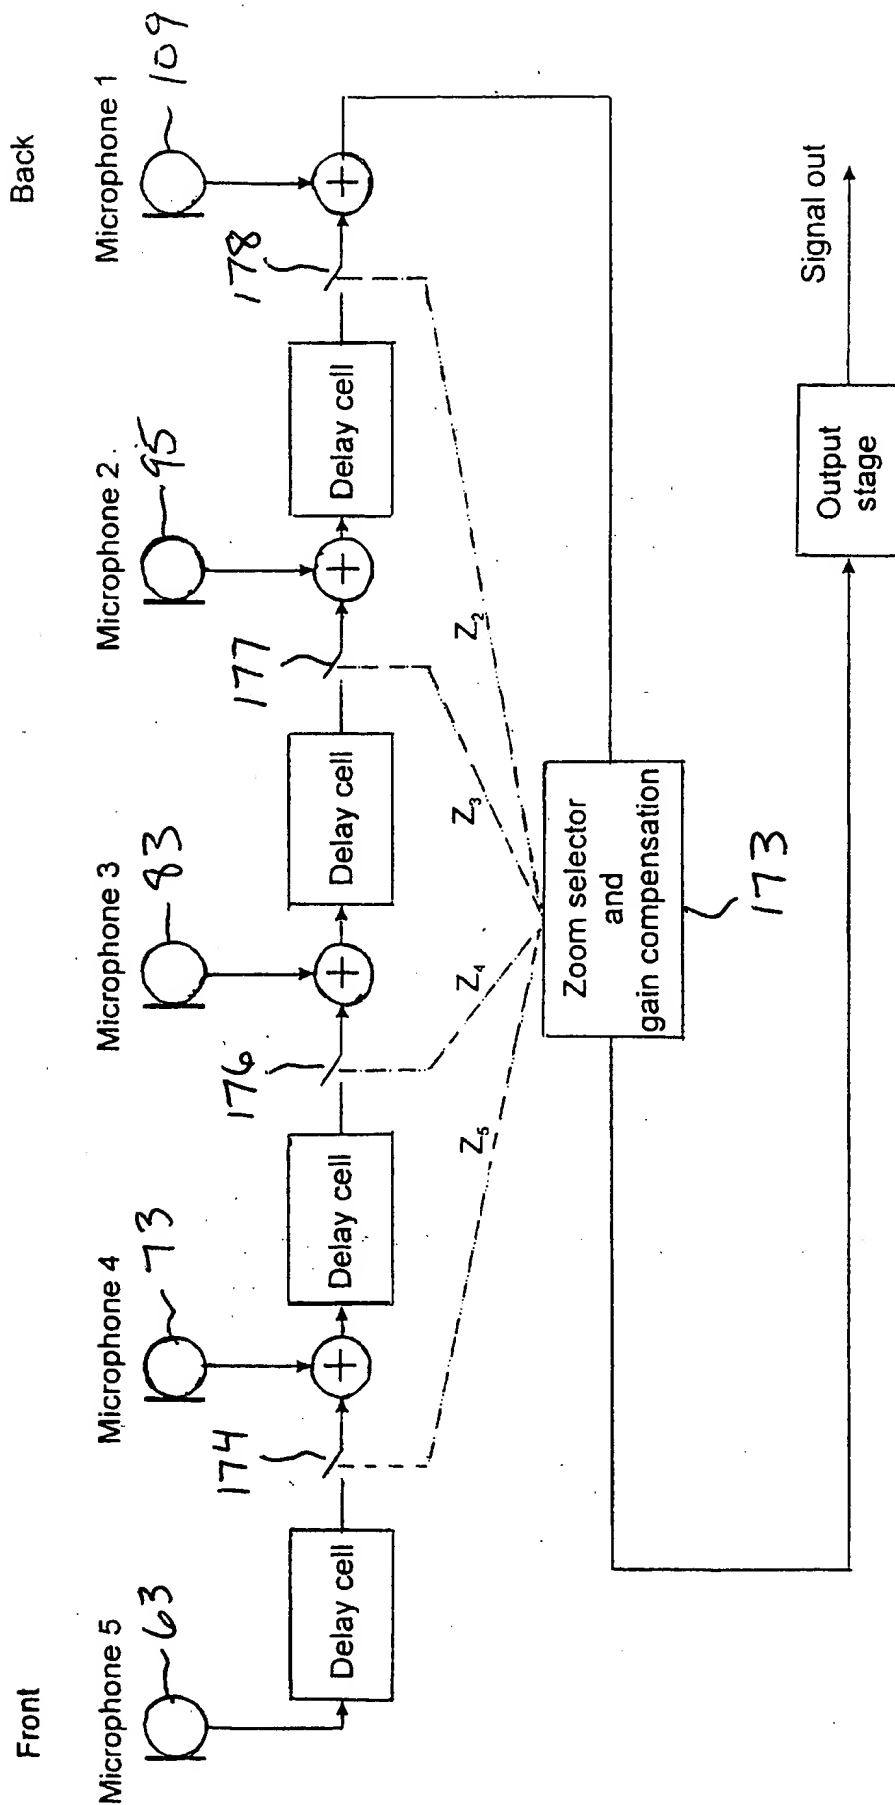


FIG. 16a

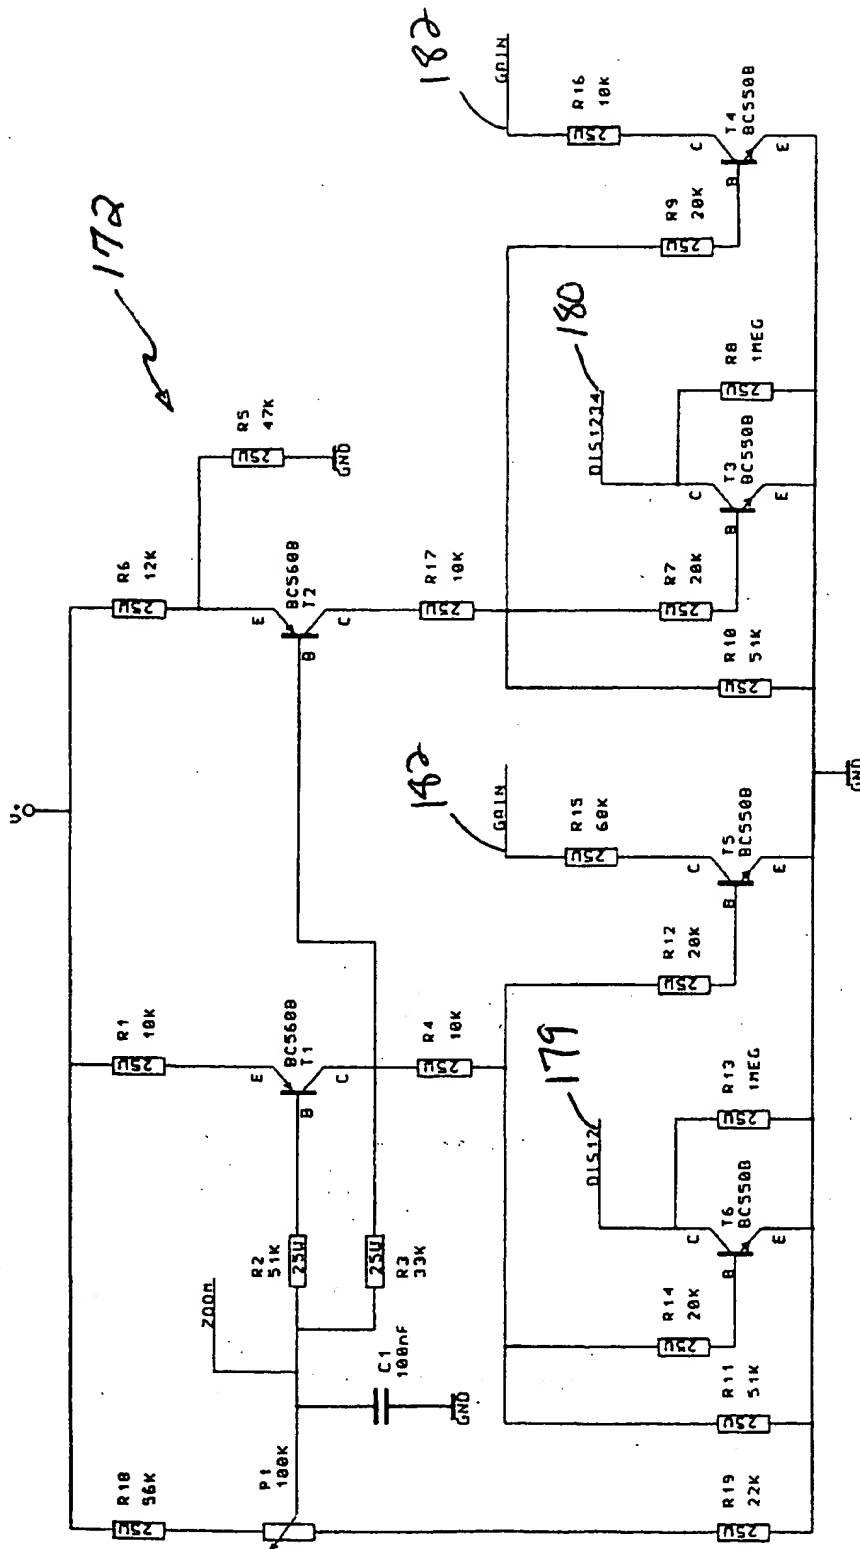


FIG 16b

181

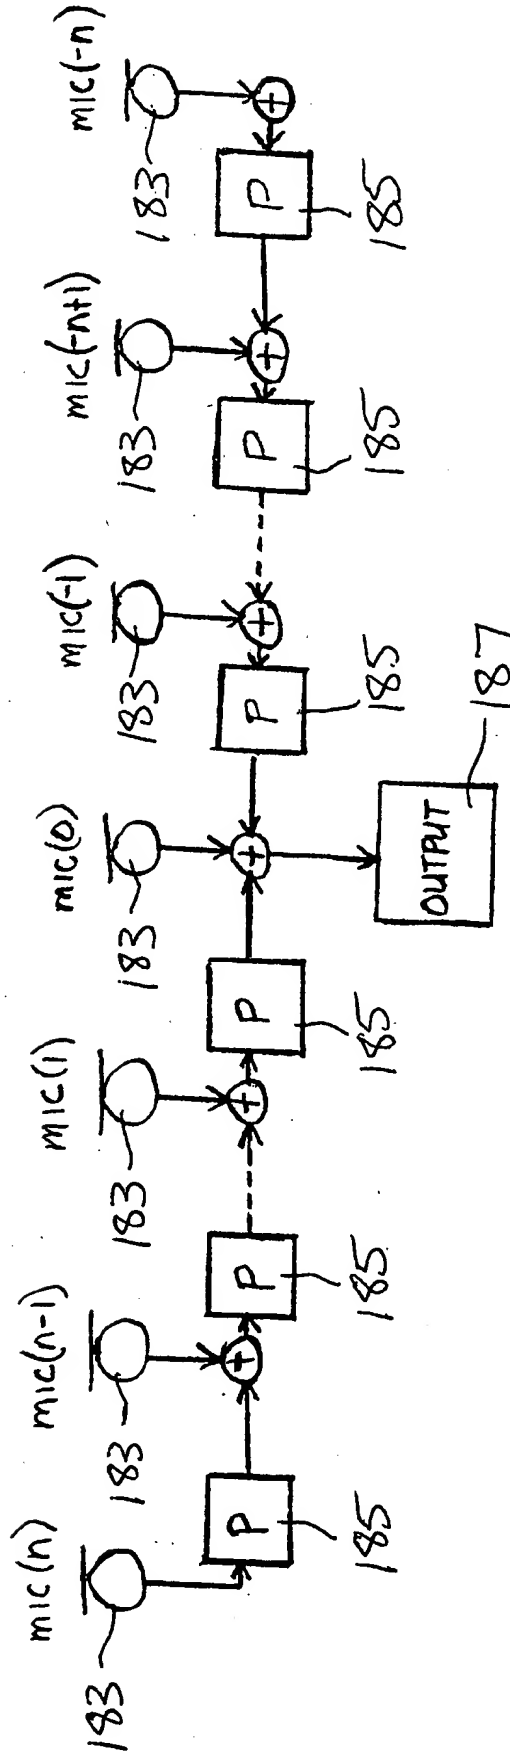



Fig. 17

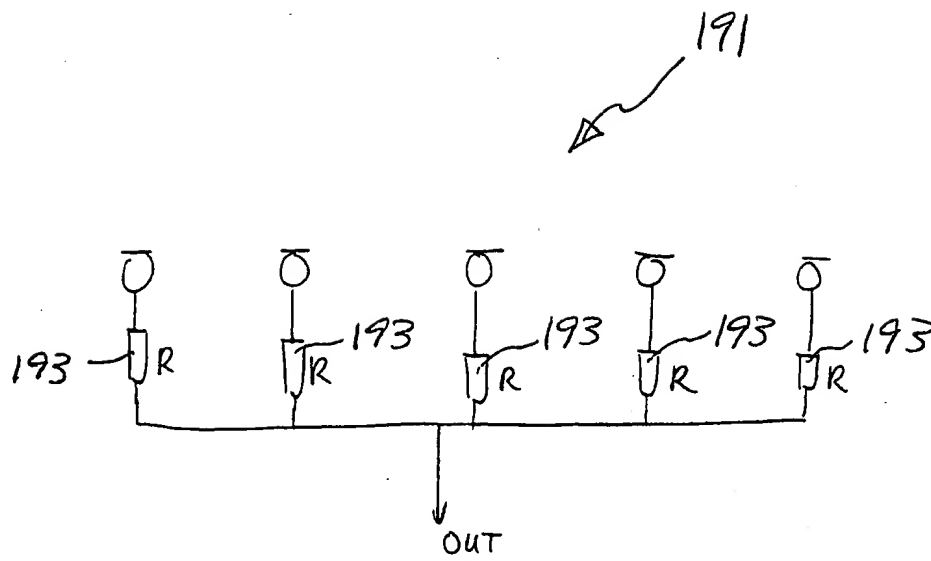


FIG. 18

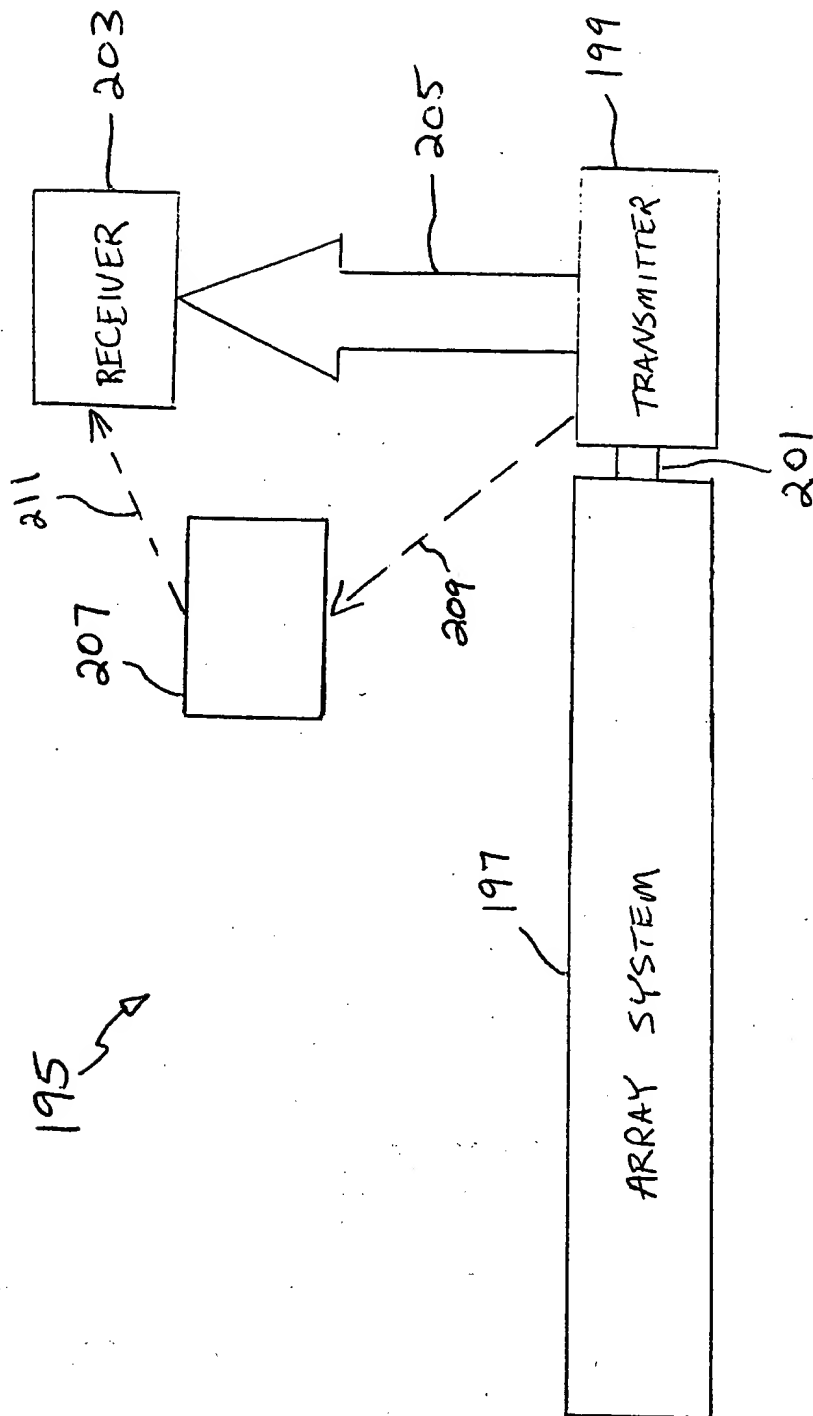


FIG. 19

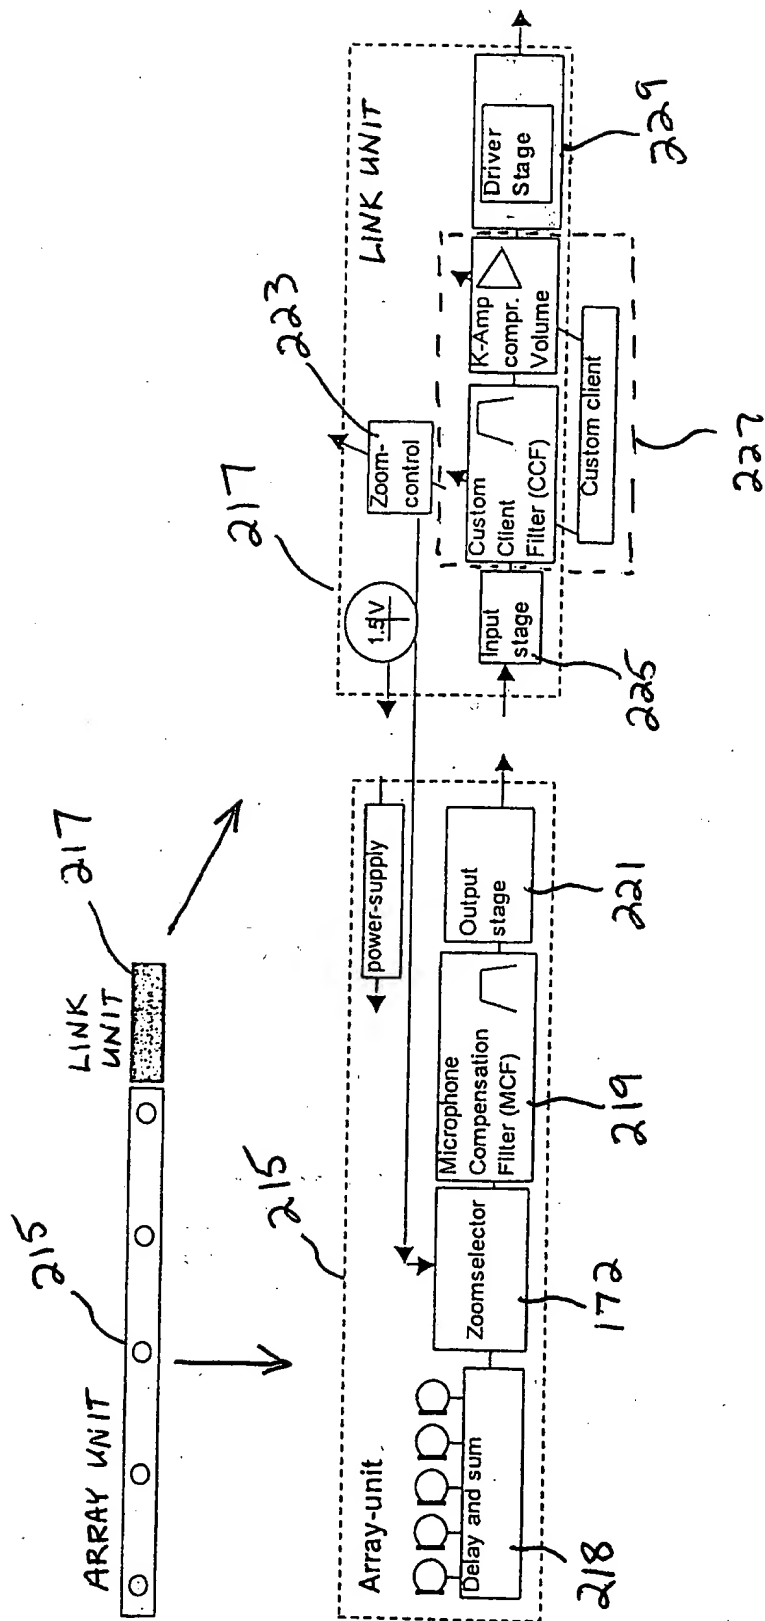


FIG. 20



# INTERNATIONAL SEARCH REPORT

Intern. application No.

PCT/US00/05584

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : H04R 3/00; H04R 25/00; G01S 3/80

US CL. : 381/92; 381/313; 367/118

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 381/92; 381/313; 367/118

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
USPTO database, microphone array, summation, delay

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,E --- Y,E	US 6,049,607 A (MARASH et al) 11 April 2000 (11.04.2000), figure 2, column 6, lines 23-37	1-2,4,19- 20,34,36,38,39 ----- 1-42
X,P --- Y,P	US 5,905,692 A (DOLAZZA et al) 18 May 1999 (18.05.99), figures 1, 3	1, 19, 34 ----- 2-18, 20-33, 35-42
A	US 5,657,393 A (CROW et al) 12 August 1997 (12.08.1997), figure 3, column 2, lines 8-	1-41
Y	US 5,847,621 A (GUTIERREZ) 08 December 1998 (08.12.1998), figure 2	5,21
Y	US 5,793,875 A (LEHR et al) 11 August 1998 (11.08.1998), figure 14	1-42

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T"

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X"

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&"

document member of the same patent family

Date of the actual completion of the international search

09 May 2000 (09.05.2000)

Date of mailing of the international search report

21 JUN 2000

Name and mailing address of the ISA/US

Commissioner of Patents and Trademarks

Box PCT

Washington, D.C. 20231

Facsimile No. (703)305-3230

Authorized officer

Forester W. Isen

Telephone No. (703) 305-3900

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**